


## ■ Features

- Highest Luminous Flux
- Super Energy Efficiency
- Long Lifetime Operation
- Superior ESD protection
- Superior UV Resistance

## ■ Applications

- Read lights (car, bus, aircraft)
- Portable (flashlight, bicycle)
- Bollards / Security / Garden
- Traffic signaling / Beacons
- In door / Out door Commercial lights
- Automotive Ext

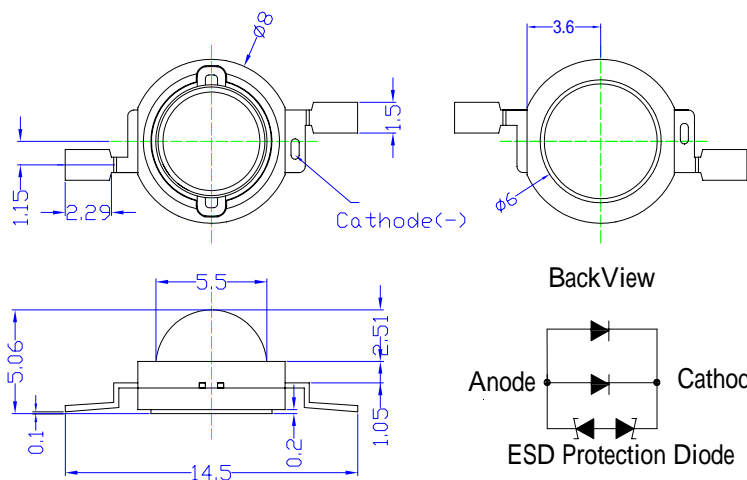


Unit:mm  
Tolerance:±0.30mm

■ **Absolute Maximum Rating** (Ta=25℃)

Item	Symbol	Value	Unit
		White/ Warm white	
DC Forward Current	I <sub>F</sub>	1600	mA
Pulse Forward Current*	I <sub>FP</sub>	2000	mA
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	P <sub>D</sub>	7200	mW
Operating Temperature	Topr	-30 ~ +85	
Storage Temperature	Tstg	-40~ +100	
Lead Soldering Temperature	Tsol	260 /5sec	

## ■ Directivity

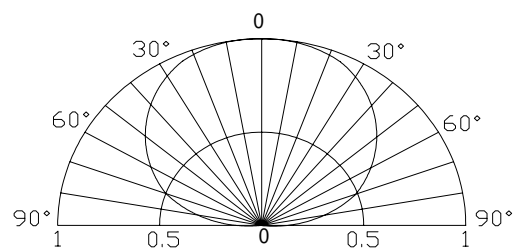

\*Pulse width Max.10ms    Duty ratio max 1/10

### ■ Electrical -Optical Characteristics (Ta=25 )

Part Number	Color		V <sub>F</sub> (V)			I <sub>R</sub> (μA)	CCT (K)	Luminous Flux v (lm)			λD(nm)			2θ1/2 (deg)
			Min.	Typ.	Max.	Max.	Typ	Min.	Typ.	Max.	Min.	Typ.	Max.	
			I <sub>F</sub> =1400mA			V <sub>R</sub> =5V	I <sub>F</sub> =1400mA							
OSW4XDE5E1E	Pure White	W4	3.3	3.5	4.5	10	6500	300	320	-	X=0.31 ,Y=0.33			140
OSM5XDE5E1E	Warm White	M5	3.3	3.5	4.5	10	3000	280	300	-	X=0.44,Y=0.41			

Note: Don't drive at rated current more than 5s without heat sink for Xeon 5 emitter series.

## ■ Handling of Silicone Lens LEDs

Notes for handling of silicone lens LEDs

- Please do not use a force of over 3kgf impact or pressure on the silicone lens, otherwise it will cause a catastrophic failure.
- The LEDs should only be picked up by making contact with the sides of the LED body.
- Avoid touching the silicone lens especially by sharp tools such as Tweezers.
- Avoid leaving fingerprints on the silicone lens.
- Please store the LEDs away from dusty areas or seal the product against dust.
- When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the silicone lens must be prevented.
- Please do not mold over the silicone lens with another resin. (epoxy, urethane, etc)

