


Baseus

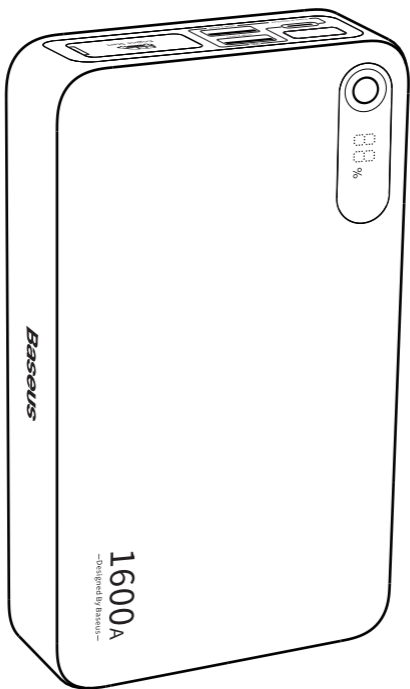

Product Introduction

This product is a car jump starter with PD fast charger. It can jump start cars and supports charging for most cell phones and tablets.

Product Specifications

Name: Baseus Super Energy Pro+ Jump Starter 1600A

Model No: BS-CH004-1

Battery Capacity: 16000mAh/59.2Wh

Rated Output Capacity: 10500 mAh (5V~6A)

Energy Conversion Rate : 75%

Input:

Type-C:5V~3A; 9V~3A; 15V~3A; 20V~3.25A 65W (Max.)

Output:

USB-A1:5V~3A; USB-A2:5V~3A

Type-C:5V~3A;9V~3A;12V~3A;15V~3A;20V~3.26A

PPS: 3.3-21.0V~3.0A

Total Output:

USB-A1+USB-A2=5V~3A;

USB-A1+USB-A2+Type-C=15W+65W


Starting Voltage: 12Vdc

Starting Current: 800A


Peak Current: 1600A

Product Features and Schematic Design

- ① : Light
- ② : Type-C
- ③ : USB-A1
- ④ : USB-A2
- ⑤ : EC5 socket

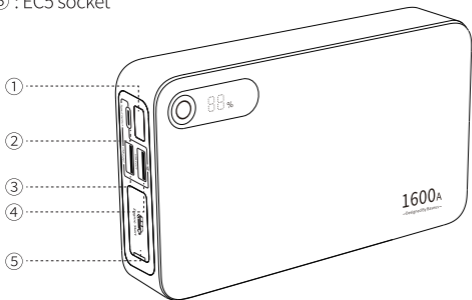

Accessories: Alligator clips + Cable



Package Including

Jump Starter	*1
User Manual	*1
Warranty Card	*1
Smart Alligator Clips	*1
Type-C Charging Cable	*1

Operation Instructions

Start a Car:

1. Plug in the alligator clips into the EC5 port of the machine, and the indicator of the clips will flash red and green.
2. Open the engine hood and connect the alligator clips to your car battery (make sure the polarities are connected properly).
3. Go back inside to your car and start the engine.
4. Please disconnect the jump starter immediately once the car starts.

Product Safety Information

1. Please check the battery level of the product before use, if the battery level is below 50% or there's overheating please do not use the product.
2. Please make sure the EC5 plug is completely and properly plugged into the jump starter, otherwise it may affect the performance, and cause some bad results to the plastic part of the port, like melting if it's severe.
3. Please do not use the product to jump start your car at a very high frequency, the interval between two starts should be at least over 30 seconds.
4. Please start your car immediately after the alligator clips and the jump starter are connected.
5. If it fails to start your car, please check to see if the alligator clips are connected properly. Or check if there's rust or filth at the contacts, if there is, please clean it first and then start your car. If it fails to start the car three times in a row, please stop using the product to jump start your car, for it may damage the product.

6. Do not store this product in places with high temperature, harsh light or intense magnetic field, or put it in hostile environments like fire source, if water enters the product, please let it dry naturally before use.
7. Improper use of the product may cause damage to the product or even endanger personal and property safety.
8. Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
9. Disassembly of this product by non-professionals is strictly prohibited.
10. Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
11. Avoid actions that could damage the product such as bashing, throwing, stepping on etc.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Declaration on hazardous substances and elements contained in electronic products

Part Description	Hazardous substances and elements					
	Lead (pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (CrVI)	Polybrominated Biphenyls (PBB)	Polybrominated Biphenyl ethers (PBDE)
PCB	X	O	O	O	O	O
Plastic	O	O	O	O	O	O
Battery	O	O	O	O	O	O
Accessory	O	O	O	O	O	O

This form is compiled in accordance with SJ/T 11364.

O: It indicates that the content of the harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X: The content of harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T 26572 standard.

Warm Tip: The 10-year icon refers to the "effective life of environmental protection", not the product quality assurance period. Electronic products all contain harmful substances such as lead, mercury and cadmium. Once they are overused, harmful substances may leak or mutate, cause pollution to the environment, or cause serious damage to people and property. The term of "environmental protection use" means that all electronic products will be required to use within this effective period. We will no longer be responsible for the quality of the products due to the safety risks that arise after the safe use period.



Manufacturer: Shenzhen Baseus Technology Co., Ltd.

Add: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd,
Gangtou Community, Bantian Street, Longgang District, Shenzhen

Executive Standard: GB/T 35590-2017

Hotline: +86-4000-712-711 Website: www.baseus.com

PB3849Z_P0A0

1000055386

Designed by Baseus

Made in China