

LED line



nature's energy
your inspiration

SUNSTREET



independent of traditional
energy sources

energy-efficient
solution

PIR sensor

mounting on pole Ø60

wall mounting possible

SUNSTREET

5
WARRANTY

MAX
-40÷50°C

MAX
5÷45°C

IP
54



Photovoltaic power [W]:
8-12

Battery [mAh]:
3560-8000

Luminous flux [lm]:
750-1300

Beam angle [°]:
140x80

Colour temperature [K]:
6500

Lifetime [h]:
L70B50 - 35.000

Housing:
ABS



Remote control functions


- Continuous mode** – the luminaire stays on regardless of charging status; light output gradually decreases and stabilizes at 15% after approx. 6 hours.
- Sensor mode** – low standby lighting with motion-triggered maximum brightness for 20 seconds, then returns to standby.
- Countdown modes (3h / 4h+Sensor / 6h)** – sets operating time from dusk. In 4h+Sensor mode, the luminaire works for 4 hours, then switches to standby and activates full brightness on motion detection, optimizing battery usage.
- Auto mode** – automatic ON/OFF based on charging status; medium light level during discharge, turns off when charging resumes.

Solar road luminaire SUNSTREET

SYMBOL	PHOTOVOLTAIC POWER [W]	BATTERY [mAh]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
211315	8	3560	140x80	6500	750
211322	12	8000	140x80	6500	1300



DIMENSIONS [mm]

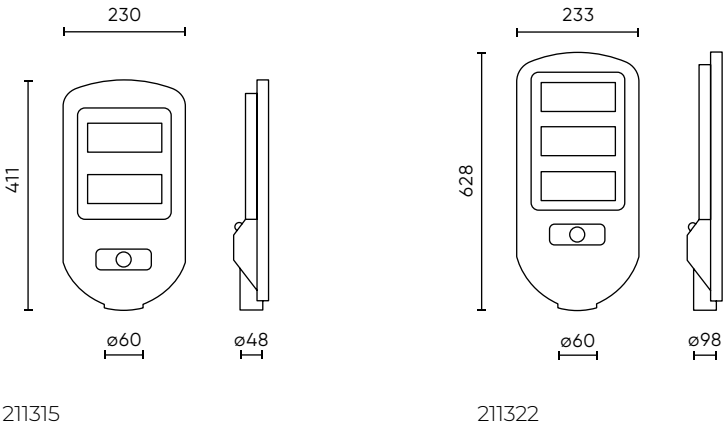

LED line

LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu



/LEDIN Group Sp. z o.o.



/LED line



/LED line