



# Introducing the New 3M<sup>™</sup> Aura<sup>™</sup> 9300+ Series Disposable Respirators

3M make the respirators you need to wear to be protected. They also develop the respirators you want to wear. The brand new  $3M^{\text{TM}}$  Aura $^{\text{TM}}$  9300+ Series disposable respirators are the result of 3M's continuous drive to improve comfort.


It is packed with ground-breaking ideas, technologies and materials, and has retained many of the features that helped make the 9300+ Series hugely popular.

With the aid of 3M's innovative new low breathing resistance filter technology, you can breathe through your respirator with even less effort.

The 3M<sup>™</sup> Aura<sup>™</sup> 9300+ Series also features an embossed top panel that helps reduce the fogging of eyewear from warm, moist exhaled air.

inner cover web both feel incredibly soft on the skin and help to create a comfortable environment for the face

· extremely lightweight

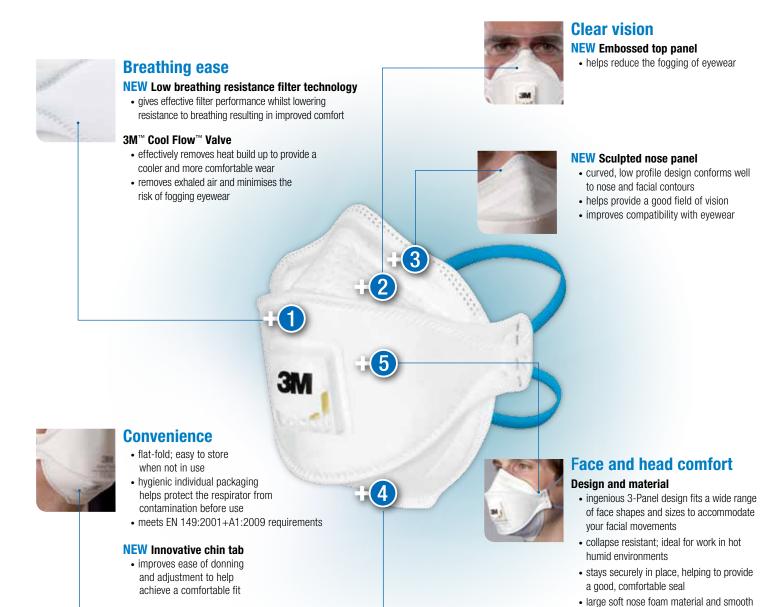


## Breathe in more freely

The 3M<sup>™</sup> Aura<sup>™</sup> 9300+ Series respirators feature 3M's brand new low breathing resistance filter technology; an innovative filter media that helps minimise breathing resistance. This enables high filtering performance with less effort on the part of the wearer, making protection even less intrusive.

**Chart (below):** When tested to EN 149:2001+A1:2009, at a flow rate of 95 litres per minute, the approximate mean inhalation breathing resistance achieved with the new 3M™ Aura™ respirators was **75%** better than the maximum limit for a EN 149 FFP1 respirator, **65%** better for FFP2 and **60%** better for FFP3.

### Making comfort up to 75% more breathable

Mean breathing resistance\* of 3M<sup>™</sup> Aura<sup>™</sup> 9300+ Series Respirators as per requirements of EN 149:2001+A1:2009

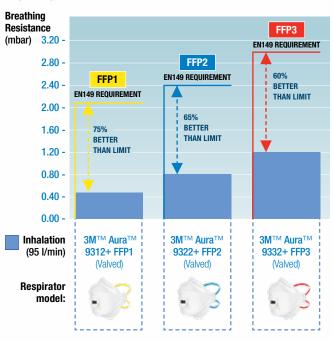

	Inhalation Breathing Resistance (95 I/min)		
Product	EN 149:2001+A1:2009 Requirement Limit (mbar)	Measured Mean (mbar)	Pooled Standard Deviation
9312+	FFP1 = 2.1	0.51	0.03
9322+	FFP2 = 2.4	0.82	0.06
9332+	FFP3 = 3.0	1.20	0.05

## Breathe out more clearly


The 3M<sup>™</sup> Aura<sup>™</sup> 9300+ Series respirators are designed to control air in such a way that it helps with another common issue with respirators: fogging eyewear.



In an unvalved model: when exhaling, the embossed pattern reduces the airflow through the upper panel, the majority of the air exits through other panels. Less moist air reaches the surface of the eyewear from the top panel, helping to minimise fogging.



In a valved model: when exhaling, the embossed pattern reduces the airflow through the upper panel, the majority of the air exits through the 3M<sup>™</sup> Cool Flow<sup>™</sup> Valve and other panels. Less moist air reaches the surface of the eyewear from the top panel, helping to minimise fogging.

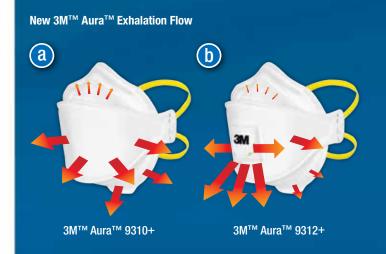




<sup>\*</sup> Individual 95% Confidence Interval for Mean, based on Pooled Standard Deviation for inhalation. Inhalation flowrate at 95 I/min. Testing performed by BSI to the requirements of EN 149:2001+A1:2009 breathing resistance and is generally representative of performance.



#### 3M™ Aura™ 9300+ Series Disposable Respirator Range: Key Industry Guide







This industry guide is not exhaustive but offers some typical industries for which  $3M^{\text{TM}}$  Aura $^{\text{TM}}$  9300+ Series Respirators may be suitable. All the  $3M^{\text{TM}}$  Aura $^{\text{TM}}$  9300+ Series respirators offer respiratory protection against solid and non-volatile liquid particulates when used and worn correctly – the required protection level will depend on the concentration of contaminants in the environment, exposure limits and other risk factors.

Warning: Selection of the most appropriate respiratory protective equipment (RPE) will depend on the particular situation and should be made only by a competent person knowledgeable of the actual working conditions and the limitations of RPE.

#### The 3M™ Aura™ 9300+ Series Features and Benefits Guide

Product Details	Features	Benefits
NEW Low breathing resistance filter technology	Innovative technology	Enables high filtering performance with less effort on the part of the wearer
3M™ Cool Flow™ Valve (3M™ Aura™ 9312+, 9322+ & 9332+ Disposable Respirators)	Effective removal of heat build up	<ul> <li>Provides a cooler and more comfortable wear</li> <li>Removes exhaled air</li> <li>Helps reduce the fogging of eyewear</li> </ul>
NEW Embossed top panel	Minimises the flow of warm, moist exhaled air through the top panel	Helps reduce the fogging of eyewear
NEW Sculpted nose panel	Curved low-profile design conforms well to nose and facial contours	Improves compatibility with eyewear     Helps provide good field of vision
NEW Innovative chin tab	Designed for ease of donning and adjustment of the respirator on the face	Help achieve a comfortable fit     Improves ease of fitting
15 Ingenious 3-panel design	<ul> <li>Moulds comfortably onto a wide range of face shapes and sizes</li> </ul>	Helps ensure a good face seal
	Stays securely in place	Respirator flexes with mouth movement while talking
	Collapse resistant	Ideal for work in hot humid environments
Large soft nose foam and low tension headbands	Help to create a comfortable environment for the face	Comfortable
Individual packaging	Hygienic and convenient	Helps protect the respirator from contamination before use     Allows practical storage and distribution

For further information on Aura 9300+ Series disposable respirators call the Health and Safety Helpline numbers below or visit **www.3M.co.uk/Aura9300plus.** 



Safety Solutions 3M United Kingdom plc 3M Centre

Cain Road Bracknell Berkshire RG12 8HT Tel: 0870 60 800 60 Safety Solutions 3M Ireland Limited

The Iveagh Building
The Park
Carrickmines
Dublin 18
Tel: 1 800 320 500



Scan this QR code with your smartphone to be directed to further information on 3M™ Aura™ 9300+ Disposable Respirators Or visit: www.3M.co.uk/Aura9300plus

13905 Please recycle. Printed in UK. © 3M 2011. All rights reserved.

<sup>\*</sup> WEL: Workplace Exposure Limit