
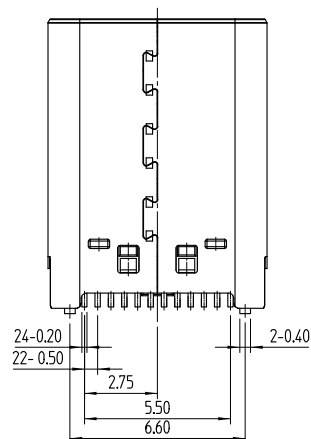
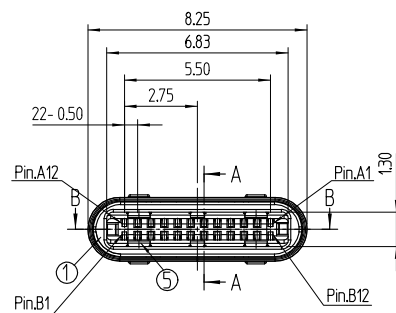
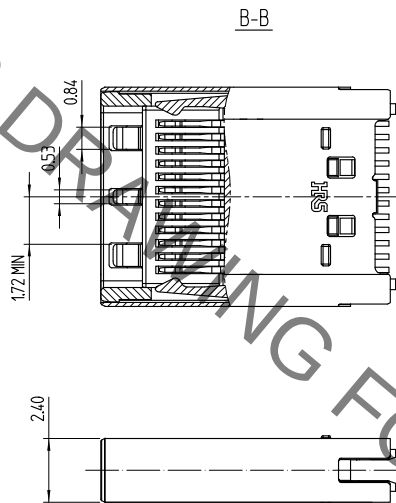
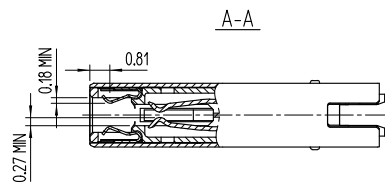



A
B
C
D
E
F

1 2 3 4 5 6 7 8

△數 COUNT	訂正事項 DESCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年月日 DATE	△數 COUNT	訂正事項 DISCRPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年月日 DATE
△	- Revised	PJS	LHJ	16_04_15	△	- Revised	PJS	LHJ	16_07_25
△	- Revised	PJS	LHJ	16_05_12	△	- Revised	PJS	KHJ	16_11_11
△	- Revised	PJS	LHJ	16_06_16	△				

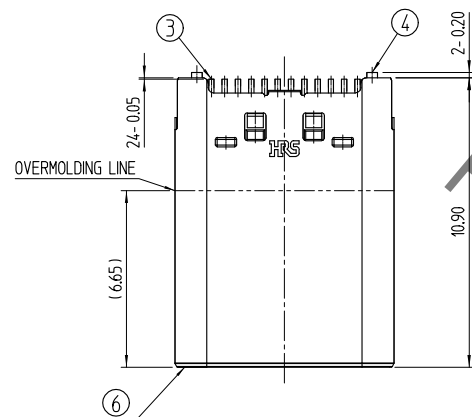



PCB MOUNTING POSITION

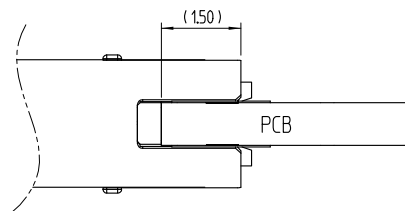




USB Type-C Plug Interface(Front View)

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	VCONN			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

ISO-VIEW(IN/S)

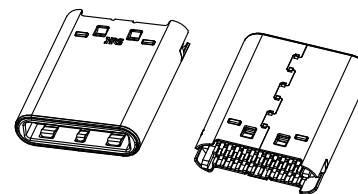

RECOMMENDED PCB LAY OUT
(General Tolerance : ±0.05)

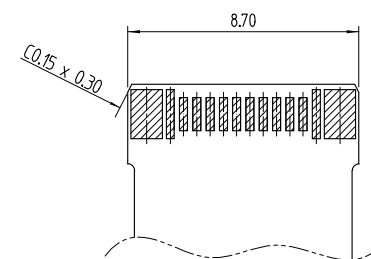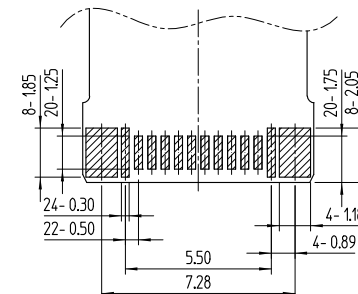

[NOTE] 1 GENERAL TOLERANCE : ±0.2
2 PACKING : 150 UNIT / TRAY

3	COPPER ALLOY	Gold Plating	6	STAINLESS STEEL	Nickel
2	LCP	UL94-V0, COLOR BLACK	5	STAINLESS STEEL	Nickel
1	PA	UL94-V0, COLOR BLACK	4	STAINLESS STEEL	Nickel
NO.	MATERIAL	FINISH,REMARKS	NO.	MATERIAL	FINISH,REMARKS
REMARK			DRAWN	DESIGNED	CHECKED
			J.S.PARK 16.04.15	J.S.PARK 16.04.15	H.J.LEE 16.04.15
			APPROVED		
			T.S.KANG 16.04.15		
			RELEASED		
			DEPT 17.09.04 ENG		
DRAWING NO.			PART NO.		
ADC3-631979			CX60-24S-UNIT		
SCALE			CODE NO		
5:1			CL6240-0001-9		
UNITS					
mm					

1 2 3 4 5 6 7 8