


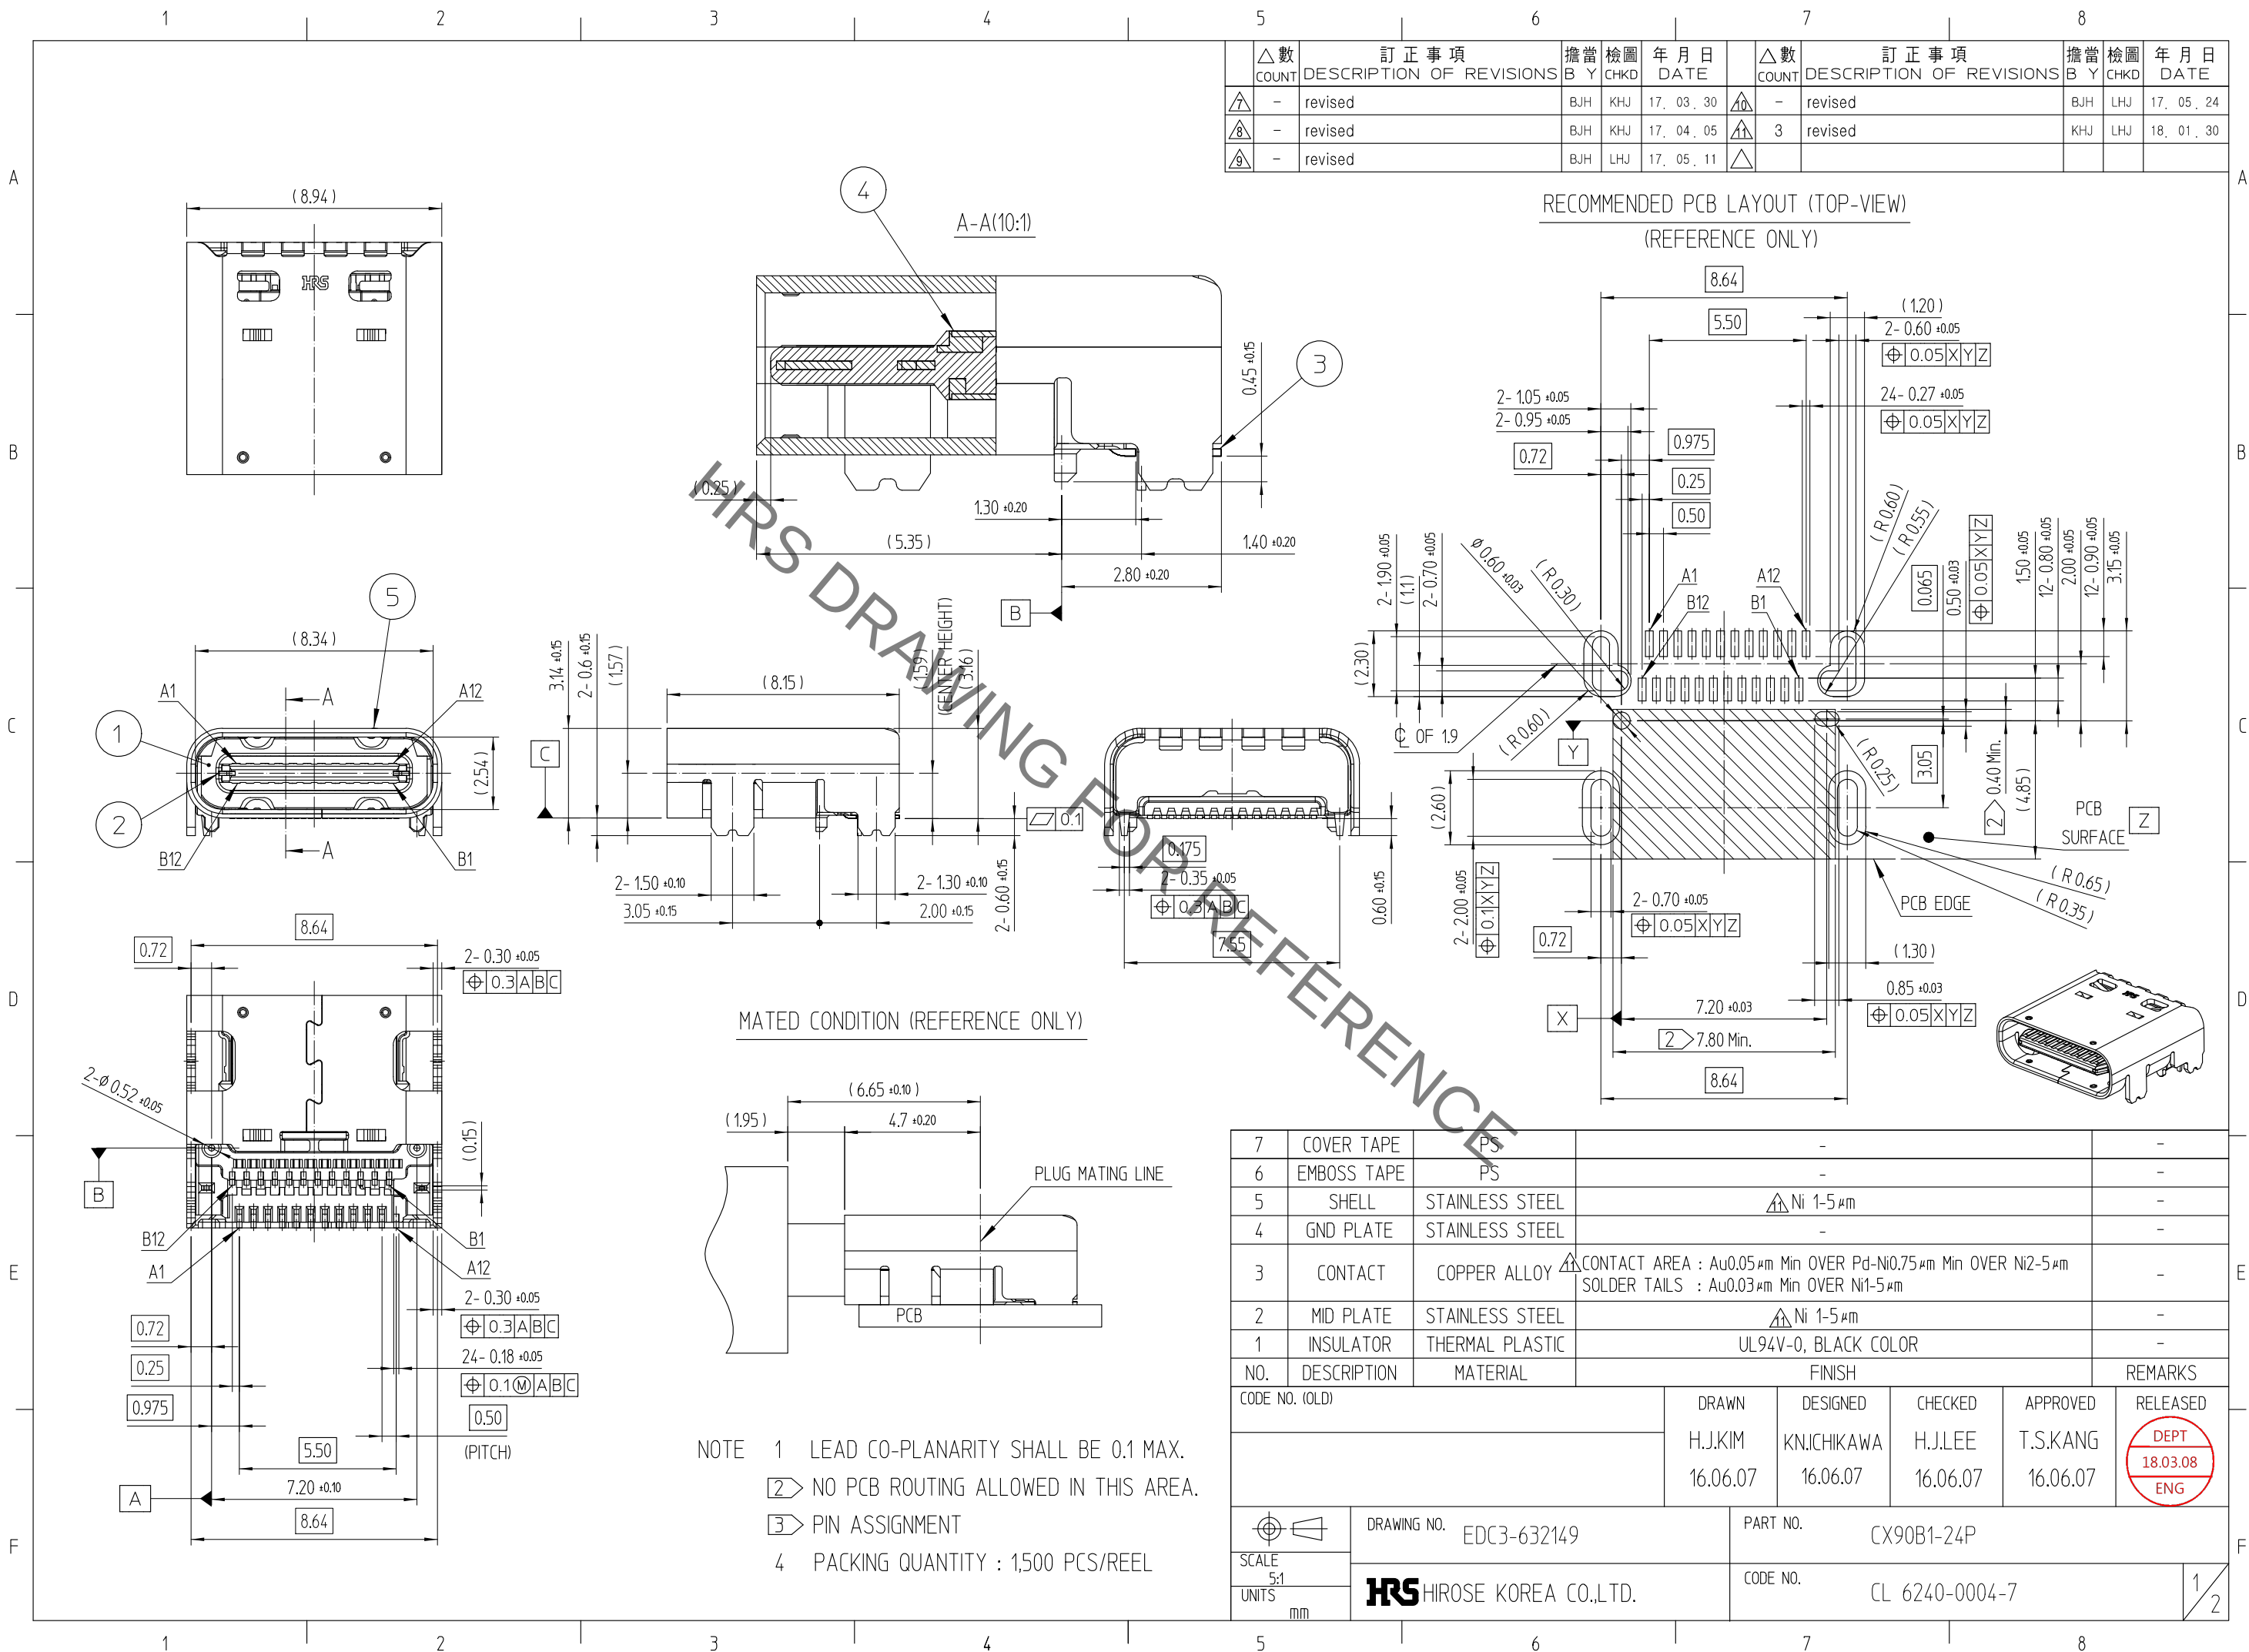

NOTE 1 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
2 NO PCB ROUTING ALLOWED IN THIS AREA.
3 PIN ASSIGNMENT
4 PACKING QUANTITY : 1,500 PCS/REEL

△數 COUNT	訂正事項 DESCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年月日 DATE	△數 COUNT	訂正事項 DESCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年月日 DATE
△7	- revised	BJH	KHJ	17. 03. 30	△10	- revised	BJH	LHJ	17. 05. 24
△8	- revised	BJH	KHJ	17. 04. 05	△11	3 revised	KHJ	LHJ	18. 01. 30
△9	- revised	BJH	LHJ	17. 05. 11	△				

7	COVER TAPE	PS	-	-
6	EMBOSS TAPE	PS	-	-
5	SHELL	STAINLESS STEEL	△Ni 1-5 μm	-
4	GND PLATE	STAINLESS STEEL	-	-
3	CONTACT	COPPER ALLOY	△CONTACT AREA : Au0.05 μm Min OVER Pd-Ni0.75 μm Min OVER Ni2-5 μm SOLDER TAILS : Au0.03 μm Min OVER Ni1-5 μm	-
2	MID PLATE	STAINLESS STEEL	△Ni 1-5 μm	-
1	INSULATOR	THERMAL PLASTIC	UL94V-0, BLACK COLOR	-
NO.	DESCRIPTION	MATERIAL	FINISH	REMARKS
CODE NO. (OLD)		DRAWN H.J.KIM 16.06.07	DESIGNED KNJ.CHIKAWA 16.06.07	CHECKED H.J.LEE 16.06.07
		APPROVED T.S.KANG 16.06.07	RELEASED DEPT 18.03.08 ENG	
DRAWING NO. EDC3-632149		PART NO. CX90B1-24P		
SCALE 5:1 UNITS mm		CODE NO. CL 6240-0004-7		
HIROSE KOREA CO.,LTD.		1/2		

Feb.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

