

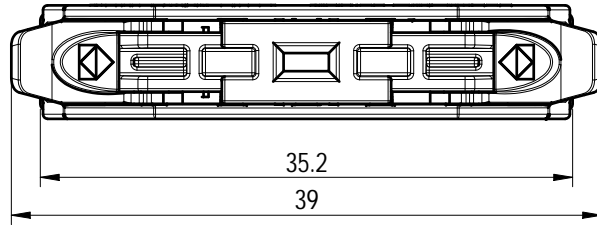
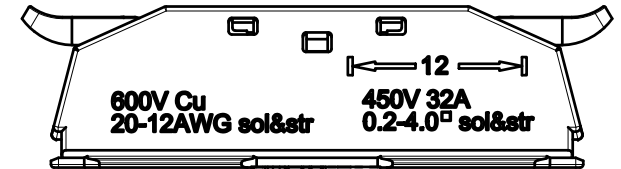



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent. 未经授权复制或传播本文件内容，或在本文件内容基础上进行发明、实用新型、外观设计、专利、商标、注册、其他知识产权等侵权行为，公司将依法追究。本公司保留对本文件的所有权利。

未注公差/General tolerances (mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

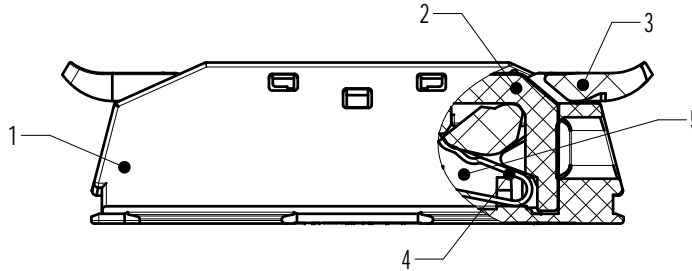


UL 标准/UL Standard:	
额定电压/电涌/Rated Voltage(V)/Current(A)	600
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电涌/Rated Voltage(V)/Current(A)	450/32
工频耐压/Withstanding voltage(V/1Min)	AC2500
线数范围/Poles	N=01P
线径范围(硬线和软线)/Wire Range(rigid and	24~12 / 0.2~4.0
线数范围/Poles	N=01P
剥线长度/Stripping length(mm)	12~13
使用温度范围/Operating temperature(°C)	-40~+85(IEC)



Notes: The A&Z(H) in the name means:A(H) and Z(H)

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2



SCAL 1:1



		MATERIAL: /	SURFACE/COLOR: /			
		MAT NO./REV: - / 00	MAT STATUS: 设计放行			
APPD: 蓝贵凡	2023.06.10	NAME				
CHKD: 曹利彬	2023.06.10	DGBSC-SG02/4-01P (1Y-00A&ZH)				
DRFT: 曹利彬	2023.06.10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200199127	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00		/	曹利彬	2023.06.10