
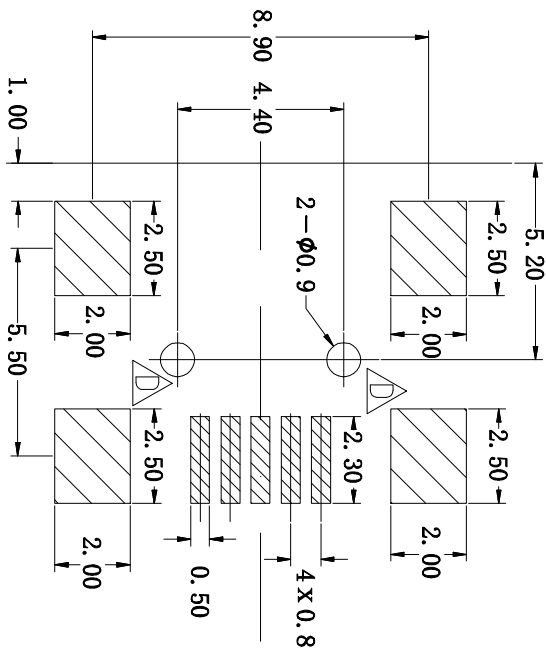
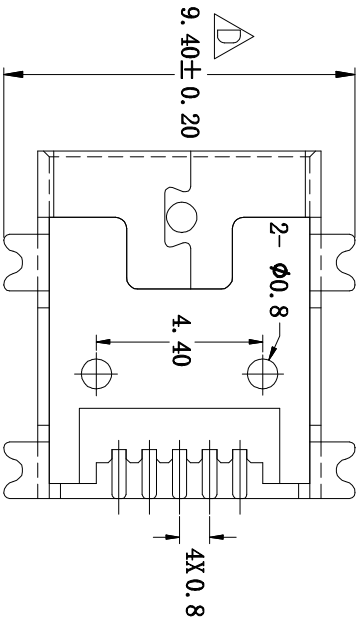
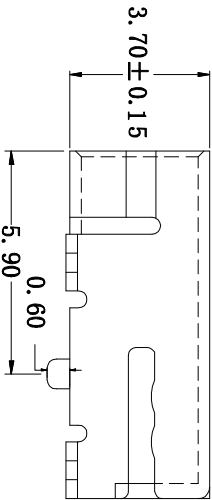
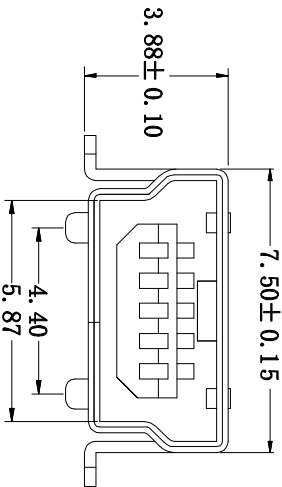


PART NUMBER	ESB34101000Z 838C360SJU55B0102F
-------------	------------------------------------

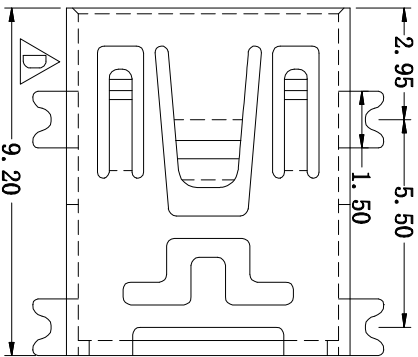

NOTES:

1.MATERIAL:
TERMINAL-COPPER ALLOY,
SHIELD-BRASS OR SPC
HOUSING-LCP UL94V-0.

2.PLATING:
CONTACT AREA-SELECTIVE GOLD PLATING,
TAILS-TIN PLATING OVER NICKEL,
SHIELD-NICKEL PLATING.

3.ELECTRICAL:
VOLTAGE RATING: 30 VAC RMS.
CURRENT RATING: 1.0 AMP
CONTACT RESISTANCE: 50 MILLIOHMS MAX
INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
DIELECTRIC STRENGTH: 100 VAC RMS 60 HZ, 1 MIN
OPERATING LIFE: 2000 CYCLES MIN
STORAGE: -40°C TD +85°C
OPERATION: -40°C TD +85°C
WAVE SOLDERING TEMPERATURE 250-260(3~5 SECONDS)
ROHS COMPLIANT.

VER.	DATE	MOD. NO.	DESCRIPTION	DRA.	CHE.	APP.
	2022.09.29		NOTES REVIST	YI-CHIEH CHANG	GARY KUO	GARY KUO
	2023.03.16		CHANG PART NUMBER	XIU-CHUN ZHANG	GARY KUO	GARY KUO
	2023.05.10		SIZE MODIFICATION &CHANG PART NUMBER	XIU-CHUN ZHANG	GARY KUO	GARY KUO

GENERAL TOLERANCE		DATE	2023.03.16	UNIT	mm	DRAWER	XIU-CHUN ZHANG	SERIES	ESB3	FLASH EXCEL CELL  ELECTRONIC CO., LTD.				
X. ±0.3 X.X ±0.2 X.XX ±0.1	SCALE	5:1		 		CHECKER	GARY KUO	TITLE ESB34			DRAWING NO. 838C360S.JU55B0X02X-SD.dwg			
ANGLE	ASSEMBLY NO.					APPROVER	GARY KUO							
X. ±5° X.X ±2.5°	REFERENCE								FRAME	A3	REVISION	D	SH.	1 OF 1

0 10 20 30 40 50 60 70 80 90 100