

圖號. DRAWING. NO : FP3F-HC-3

品名 NAME : HEAT SHRINKABLE FEMALE DISCONNECTS

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
1	產品尺寸更改	2017. 08. 25	ANDY
2	產品尺寸更改	2023. 07. 03	KEN
3	F值公差修改	2024. 12. 18	KEN


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

NOTE:


1. MAXIMUM ELECTRICAL RATING: 300 VOLTS
2. SHRINK TEMP: 150 °C
OPERATING TEMP: -10 °C ~ 105 °C
3. REINFORCEMENT SLEEVE: C TYPE SLEEVE
4. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
5. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
6. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
7. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F REF.	L ±3.00	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	F1-6.4HC	0.8x6.4	6.6	7.9	36.0	1.7	0.4
16-14 AWG 1.5-2.5 mm ²	F2-6.4HC	0.8x6.4	6.6	7.9	36.0	2.3	0.4
12-10 AWG 4-6 mm ²	F5-6.4HC	0.8x6.4	6.6	7.9	36.0	3.4	0.4

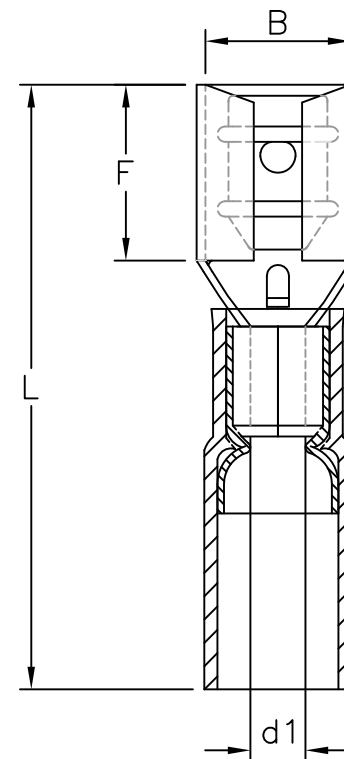

認可 APPROVALS

第三視角
THIRD VIEW



MATERIAL

單位UNIT

製圖 DRAFT: TINA

設計 DESING: KEN

核可 CHECKED: KEN

INSULATION : HEAT-SHRINK TUBE

MATERIAL : BRASS

TIN PLATING

m/m

比例SCALE



集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE: 2015.01.05