


Flexible LED strip

AKTOFlexLine

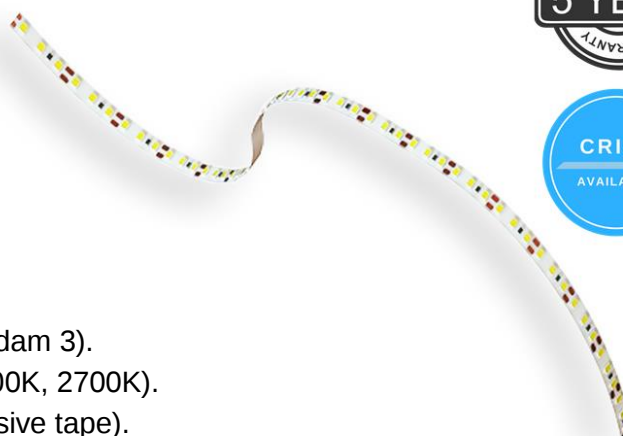


- High color rendering index CRI>90.
- Minor voltage drop: 4 oz PCB.
- Low color temperature tolerances (MacAdam 3).
- Wide range of colors (6500K, 4000K, 3000K, 2700K).
- Easy installation (e.g. double-sided adhesive tape).
- Long life time: >50 000 h.
- Extensive options of use (e.g. for furniture, architectural, accent lighting).
- 5-year warranty.
- Made in Europe.

Product specifications:

Model	AFLP-120V9624M-XW	AFLP-120V22024M-XW
Dimensions, mm	1000x8x1.20	1000x8x1.20
Current, A	~0.4	~0.6
Voltage, V	24 DC	24 DC
Power, W/m	~9.6	~22
LED quantity, pcs	120	120
Luminous flux, Lm	990 (6500K); 990 (4000K); 946 (3000K); 922 (2700K)	2030 (6500K); 2030 (4000K); 1940 (3000K); 1920 (2700K);
Color rendering index, CRI	>90	>90
Light angle	120°	120°
Working temperature (Tc point)	-30° - +65°	-30° - +65°
PCB type	FLEX	FLEX
Connections	-	-
Package	5 meters	5 meters

Mechanical dimensions:

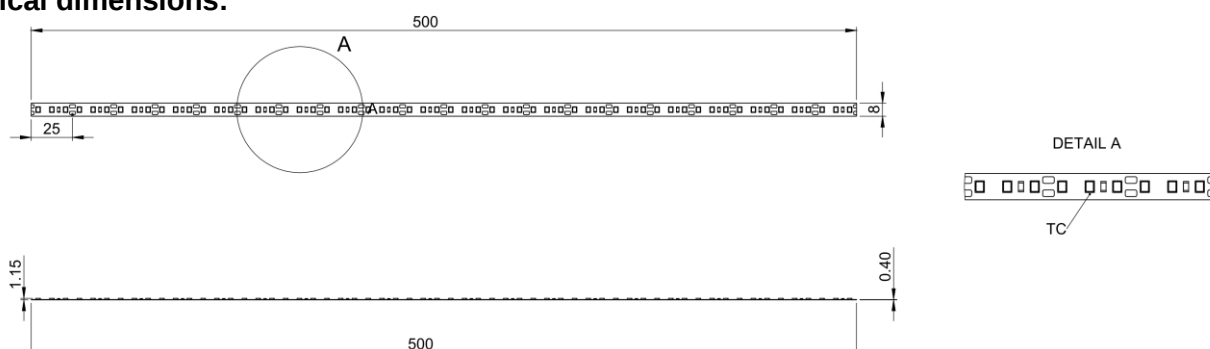

UAB AKTO

Mituvos str. 4,
LT-50130 Kaunas, Lithuania.

Mobile: +370 620 34211
E-mail: info@aktoled.com
www.aktoled.com

Registration Nr.: 302788513
VAT Nr.: LT100006898714

IBAN Number: LT667300010133518592
Bank: "Swedbank" AB
SWIFT Code: HABALT22