




Flexible LED strip

AKTOFlexLine

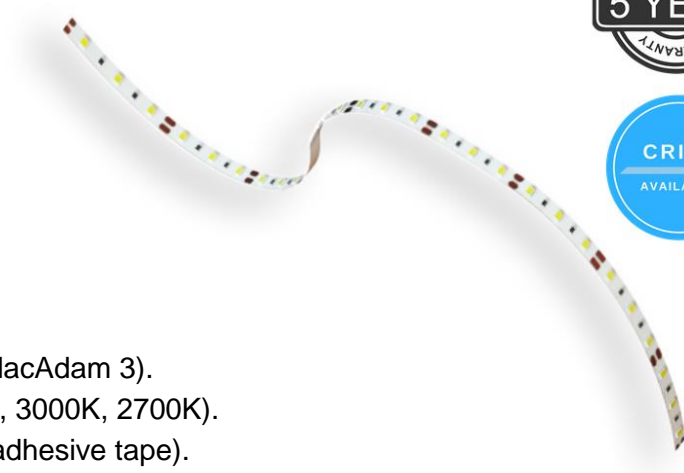


- High color rendering index CRI >90.
- Minor voltage drop: 4 oz PCB.
- Low color temperature tolerances (MacAdam 3).
- Wide range of colors (6500K, 4000K, 3000K, 2700K).
- Easy installation (e.g. double-sided adhesive tape).
- Extensive use of options (e.g. for furniture, architectural, accent lighting).
- Long life time: >50 000 h.
- 5-year warranty.
- Made in Europe.

Product specifications:

Model	AFLP-60V4824M-XW	AFLP-60V14424M-XW
Dimensions, mm	1000x8x1.20	1000x8x1.20
Current, A	~0.2	~0.6
Voltage, V	24 VDC	24 DC
Power, W/m	~4.8	~14.4
LED quantity, pcs	60	60
Luminous flux, Lm	495 (6500K); 495 (4000K); 473 (3000K); 461 (2700K)	1320 (6500K); 1320 (4000K); 1260 (3000K); 1230 (2700K)
Color rendering index, CRI	>90	>90
Light angle	120°	120°
Working temperature (Tc point)	-30° - +65°	-30° - +65°
PCB type	FLEX	FLEX
Connections	-	-
Package	5 meters	5 meters

Mechanical dimensions:

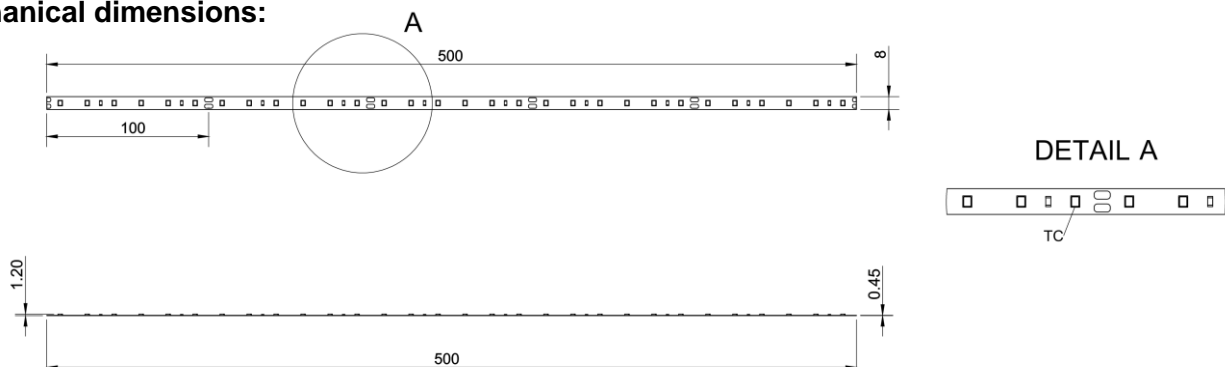

UAB AKTO

Mituvos str. 4,
LT-50130 Kaunas, Lithuania.

Mobile: +370 620 34211
E-mail: info@aktoled.com
www.aktoled.com

Registration Nr.: 302788513
VAT Nr.: LT100006898714

IBAN Number: LT667300010133518592
Bank: "Swedbank" AB
SWIFT Code: HABALT22