



LED Silicone Neon Flex

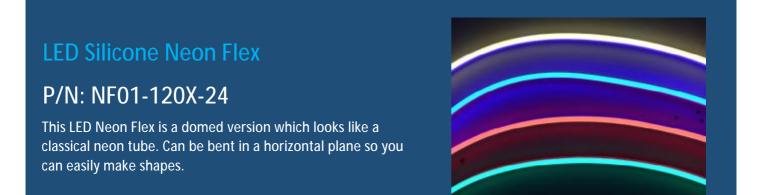

<u>Dimensions(mm):</u>

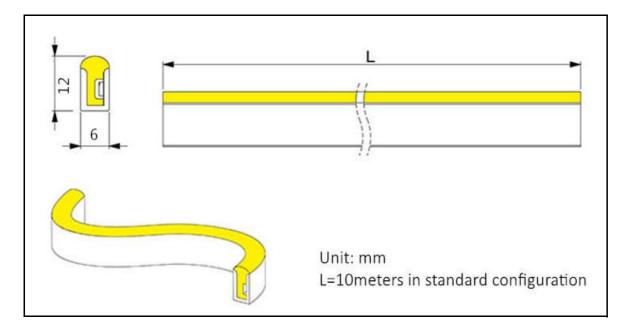

Features & benefits

- Horizontally bendable
- Enhanced 2835 LED especially for strip products
- Min. bending diameter 50 mm
- LM80 international certificate for LEDs
- · Silicone extrusion
- · UV and yellowing resistant
- · IP68 and salt-mist proof
- Flexible and can be cut in multiples of 3/6 LEDS

Application


- · LED Signage
- Indoor/Outdoor decoration lighting
- Contour application



Technical information

Colors available:	
Light output:	450lm
Voltage:	24VDC
Power:	9W/m
LED type:	2835 SMD
LED QTY:	120 LED/m
Chip Brand:	Epistar
Beam Angle:	180°degree
IP Rate:	IP68
Operating temperature	-25°C~60°C
Demension:	50,000*06*12mm
Cuttable Length	50mm, with Black point symbol
Installation	Bracket
Driving Method:	Contant Voltage Drive
Certification:	CE and RoHS compliant
Life time:	50,000hrs
Warranty:	3 Years

Bending

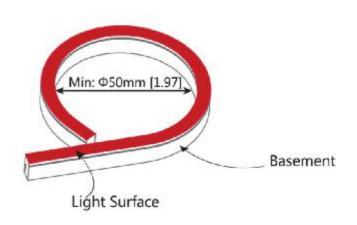

Packing information

Roll: 5 meters (net weight: 0.45 kg)	
Box: 30 rolls (net weight 13.5 kg)	
Carton Size: 43*35*28 cm	

 $Dong Sen LED\ Co.,\ Limited$

+86 150 9994 6431 / info@dongsenled.com

www.DongSenLED.com

(€ RoHS