

圖號. DRAWING. NO : FP3R-01BH-3

品名 NAME : HEAT SHRINKABLE RING TERMINALS

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
1	產品尺寸更改	2017. 08. 25	ANDY
2	產品尺寸更改	2023. 07. 03	KEN
3	產品尺寸更改	2025. 05. 23	KEN


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16
MAX AMP	9	12	17	18

NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05


WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	L ±3.00	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	R1-3.5XLBH	3.7	8.0	27.0	1.7	0.75
	R1-4MBH	4.3	8.0	27.0		
	R1-5LBH	5.3	8.0	27.0		
	R1-6BH	6.5	11.6	31.5		
	R1-8BH	8.4	11.6	31.5		
	R1-10BH	10.5	13.6	35.2		

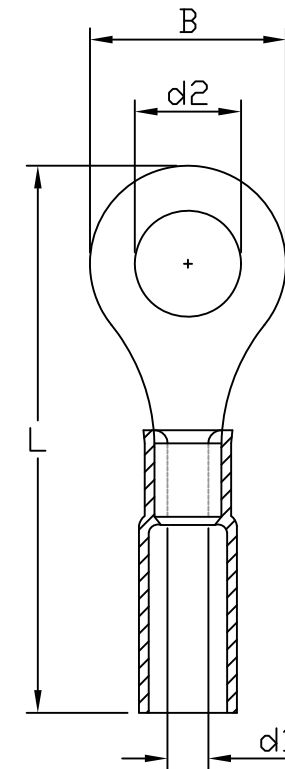

認可 APPROVALS

製圖 DRAFT:	TINA
設計 DESING:	KEN
核可 CHECKED:	KEN

第三視角
THIRD VIEW



MATERIAL

INSULATION : HEAT-SHRINK TUBE
MATERIAL : COPPER
TIN PLATING

單位UNIT

m/m
比例SCALE



集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE: 2015.01.05