

圖號. DRAWING. NO : FP3R-02BH-2

品名 NAME : HEAT SHRINKABLE RING TERMINALS

校訂版次 REVISIONS


版次	記述 DESCRIPTION	DATE	核可
1	產品尺寸更改	2017. 08. 25	ANDY
2	產品尺寸更改	2023. 07. 03	KEN

MAXIMUM ELECTRIC CURRENT

A. W. G	16	14
MAX AMP	18	30

NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C  
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm<sup>2</sup>  
INSULATED COLOR: BLUE
5. MATERIAL THICKNESS: t  
TOLERANCE: ±0.05

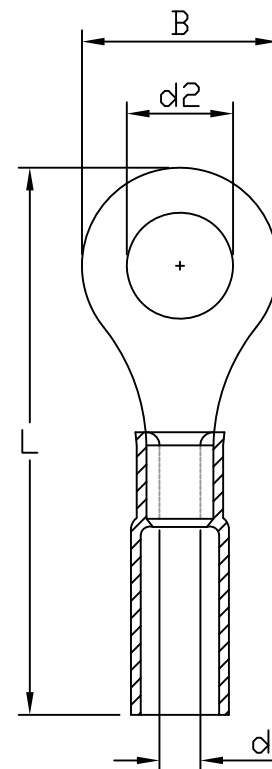

WIRE RANGE AWG/mm <sup>2</sup>	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	L ±3.00	d1 ±0.20	t
16-14 AWG 1.5-2.5 mm <sup>2</sup>	R2-3.5XLBH	3.7	8.5	30.0	2.3	0.8
	R2-4MBH	4.3	8.5	30.0		
	R2-5MBH	5.3	8.5	30.0		
	R2-6BH	6.5	12.0	33.5		
	R2-8BH	8.4	12.0	33.5		
	R2-10BH	10.5	13.6	37.2		


認可 APPROVALS

第三視角  
THIRD VIEW

MATERIAL

單位 UNIT

製圖 DRAFT:	TINA
設計 DESING:	KEN
核可 CHECKED:	KEN



INSULATION : HEAT-SHRINK TUBE
MATERIAL : COPPER
TIN PLATING

m/m
比例 SCALE



集勝端子股份有限公司  
JEESON TERMINALS Co., LTD

日期 DATE: 2015. 01. 05