

圖號. DRAWING. NO : FP3R-05BH-2

品名 NAME : HEAT SHRINKABLE RING TERMINALS

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
1	產品尺寸更改	2017. 08. 25	ANDY
2	產品尺寸更改	2023. 07. 03	KEN


MAXIMUM ELECTRIC CURRENT

A. W. G	12	10
MAX AMP	35	50

NOTE:


1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	L ±3.00	d1 ±0.20	t
12-10 AWG 4-6 mm ²	R5-4MBH	4.3	9.5	35.0	3.4	1.0
	R5-5LBH	5.3	9.5	35.0		
	R5-6BH	6.5	12.0	36.5		
	R5-8BH	8.4	15.0	41.0		
	R5-10BH	10.5	15.0	41.0		
	R5-12BH	13.0	19.2	45.5		

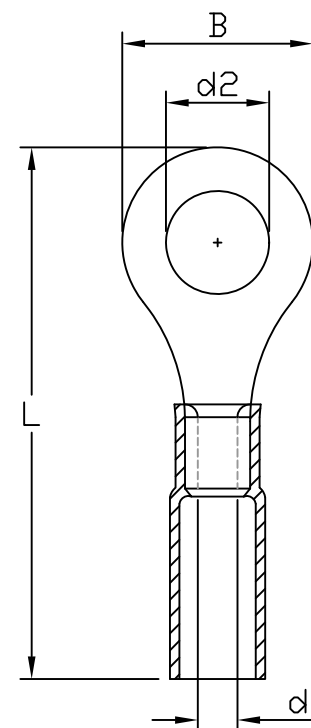

認可 APPROVALS

第三視角
THIRD VIEW



MATERIAL

單位 UNIT

製圖 DRAFT: TINA

設計 DESING: KEN

核可 CHECKED: KEN

INSULATION : HEAT-SHRINK TUBE

MATERIAL : COPPER

TIN PLATING

m/m

比例 SCALE



集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE: 2015.01.05