

ENERGIZER 321



SILVER OXIDE



General Information

Chemical System: Silver Oxide (Zn/Ag₂O)


Nominal Voltage: 1.55 Volts

Typical Weight: 0.3 grams (0.01 oz.)

Typical Volume: 0.07 cubic centimeters (0.004 cubic inch)

Impedance (40 Hz): 25 to 45 ohms

Industry Standard Dimensions




0.03 (0.001) Minimum Ref. (applies to top edge of gasket or edge of crimp, whichever is higher)

Cross Section Anode Cap Gel Anode Gasket Can Separator Cathode

DESIGNED FOR USE ON CONTINUOUS LOW DRAIN

Industry Standard Tests (21°C)

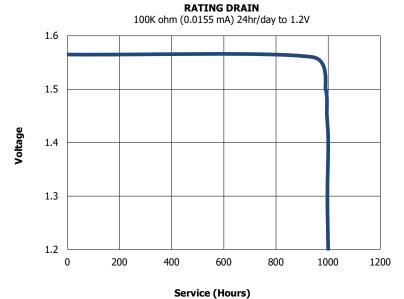

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

321GL0725 Page 1 of 1