


GP Batteries

Data Sheet


Model No.: 191

Description : Alkaline Low Drain Button Cell
Nominal Voltage : 1.50 Volts
Nominal Dimensions : $\varnothing 11.60 \times 2.05\text{mm}$
Applications : Watch (with alarm), calculator, melody card, etc.
Average Weight : 0.9g
Shelf Life : Not less than 90% of the service capacity, for 1 year storage at 20°C.
Date Code : Unless otherwise specified, each cell will carry a numeric year code and an analog month code.
Nominal Service Life : 540 hrs (at 30k Ω Load)
(to 1.0V at 20°C) 150 days (at 200k Ω Load)

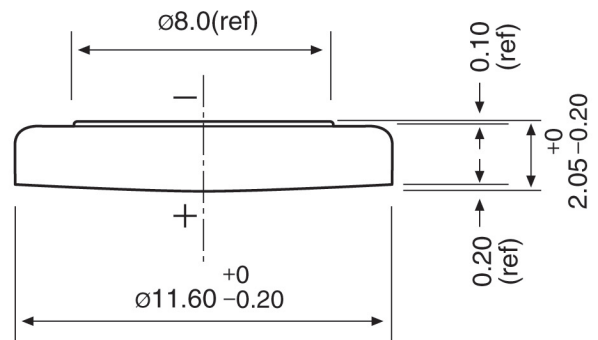

Unit : mm

Typical Discharge Characteristics at 20°C

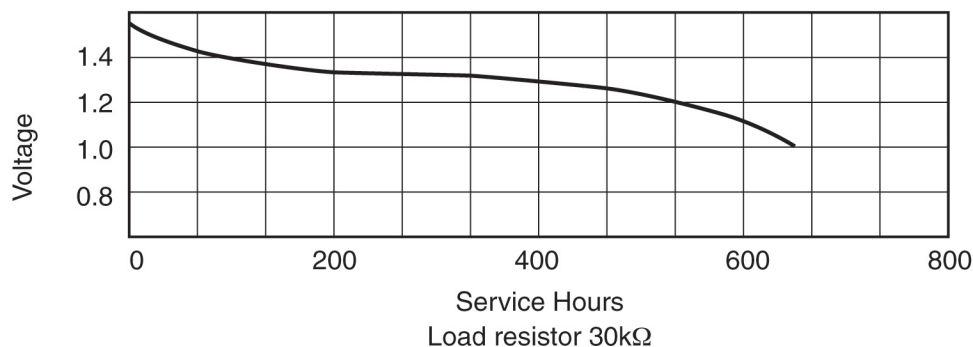

Average Service Capacity:
24mAh (rated capacity at 30k Ω load,
cut off voltage 1.0V at 20°C)

Close circuit voltage:
1.40 Volts (min.) (load resistor 2k Ω at
20°C for 0.1 to 2 seconds)

Cross Reference:

IEC	JIS	Eveready	Varta	Others
LR1120	LR1120	191	V8GA	91A