

CONTROL UNITS

SELECTOR SWITCH

Structure Description

Mounting Holder

Mounting adapters available to make $\phi 22\text{mm}$ compatible to $\phi 30\text{mm}$ Mounting diameter.

Mounting Ring

Smart mounting ring can carry with various push button type

Contact Block

Slow-action: 1NC,1NO.
Easy stackable contact block.
Compatible With LED holder.
Easy handling design.

SELECTOR

7 operation position options.
Non-LED or LED options
Several cap color options
Long shaft normal shaft
Selector & key Type

SS-9 LED LAMP

Several LED color options
Several bulb voltage options
AC/DC 24V
AC/DC 110-120V
AC/DC 220-240V
AC 380-440V
AC/DC 12V

Product Selection

H□22-□ □ □ □ □ □
1 2 3 4 5 6 7

1. SERIES

HSS22 Non-Illuminated

HLS22 LED Illuminated

2. TYPE

HSS22

HLS22

S Normal Shaft

S Normal Shaft

L Long Shaft

L Long Shaft

K Key

4. CAP COLOR

10 1NO 21 2NO/1NC

01 1NC 12 1NO/2NC

11 1NO/1NC 22 2NO/2NC

21 2NO/1NC 02 2NC

3. POSITION

2 2 Position 90°



1 2 Position 90°
(Spring Return)



3 3 Position 45°



0 3 Position 45°
(Spring Return)




4 3 Position 45°
(Spring Return From Left)



5 3 Position 45°
(Spring Return From Right)



6 2 Position 90°
(Signal continuous)



5. CAP COLOR

HSS22

HLS22

R RED

R RED

G GREEN

G GREEN

Y YELLOW

Y YELLOW

B BLACK

6. LED BULB VOLTAGE

A AC/DC 24V

E AC/DC 110-120V

I AC/DC 220-240V

M AC 380-440V

Y AC/DC 12V

7. Positions of removable key

Code	3 Position			2 Position	
	Left	Center	Right	Left	Right
0		✓			
1	✓	✓			
2		✓	✓		
3	✓	✓	✓		
4	✓			✓	
5			✓		✓
6	✓		✓	✓	✓

HIGHLY

G7

Design, specifications are subject to change without notice.

CONTROL UNITS

Operating Characteristics

Unit: mm

Item


Description

Dimensions

HLS22-S2/HSS22-S2




HEAD TYPE	ITEM	CAP COLOR
LED illuminated. HLS22-S2: Normal Shaft HSS22-S2: Normal Shaft	HSS22-S2□R	RED
	HSS22-S2□G	GREEN
	HSS22-S2□Y	YELLOW
	HSS22-S2□B	BLACK
	HLS22-S2□R	RED
	HLS22-S2□G	GREEN
	HLS22-S2□Y	YELLOW

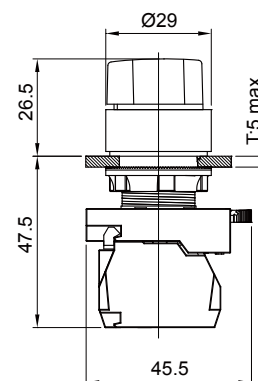

HLS22-S3 / HSS22-S3




HEAD TYPE	ITEM	CAP COLOR
LED illuminated HLS22-S3: Normal Shaft HSS22-S3: Normal Shaft	HSS22-S3□R	RED
	HSS22-S3□G	GREEN
	HSS22-S3□Y	YELLOW
	HSS22-S3□B	BLACK
	HLS22-S3□R	RED
	HLS22-S3□G	GREEN
	HLS22-S3□Y	YELLOW

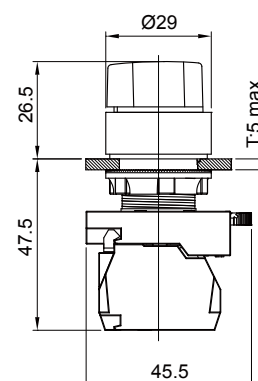

HLS22-L2 / HSS22-L2




HEAD TYPE	ITEM	CAP COLOR
LED illuminated HLS22-L2: Long Shaft HSS22-L2: Long Shaf	HSS22-L2□R	RED
	HSS22-L2□G	GREEN
	HSS22-L2□Y	YELLOW
	HSS22-L2□B	BLACK
	HLS22-L2□R	RED
	HLS22-L2□G	GREEN
	HLS22-L2□Y	YELLOW

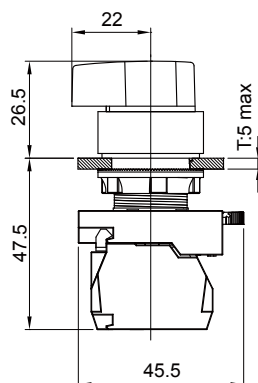

HSS22-L1/ HLS22-L1



HEAD TYPE	ITEM	CAP COLOR
LED illuminated HLS22-L1: Long Shaft HSS22-L1: Long Shaf	HSS22-L1□R	RED
	HSS22-L1□G	GREEN
	HSS22-L1□Y	YELLOW
	HSS22-L1□B	BLACK
	HLS22-L1□R	RED
	HLS22-L1□G	GREEN
	HLS22-L1□Y	YELLOW

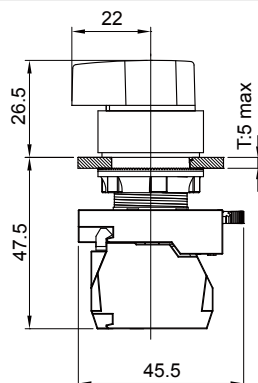

HIGHLY

G8

Design, specifications are subject to change without notice.

CONTROL UNITS

Dimensions

Unit: mm

Item


Description

Dimensions

HSS22-K0



HEAD TYPE	ITEM	CAP COLOR
HSS22-K0: Key Type	HSS22-k0□B	BLACK

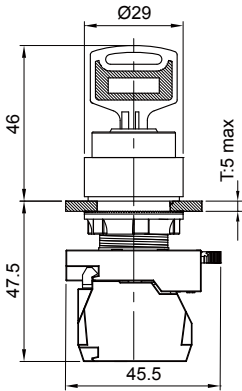

HSS22-K3



HEAD TYPE	ITEM	CAP COLOR
HSS22-K3: Key Type	HSS22-k3□B	BLACK

