


# LC1K1210P7

TeSys K contactor - 3P - AC-3 <= 440 V 12 A - 1  
NO aux. - 230 V AC coil

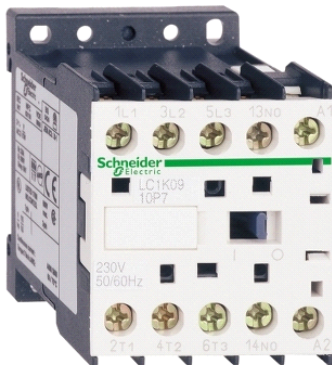

## Main

|                           |                                 |
|---------------------------|---------------------------------|
| Range                     | TeSys                           |
| Product or component type | Contacteur                      |
| Product name              | TeSys K                         |
| Device short name         | LC1K                            |
| Device application        | Control                         |
| Contacteur application    | Motor control<br>Resistive load |

## Complementary

|   |  |
|---|--|
| Utilisation category                        | AC-1<br>AC-3<br>AC-4   |
| Poles description                           | 3P   |
| Pole contact composition                    | 3 NO   |
| [Ue] rated operational voltage              | 690 V AC 50/60 Hz for power circuit<br><= 690 V AC 50/60 Hz for signalling circuit   |
| [Ie] rated operational current              | 20 A (<= 50 °C) at <= 440 V AC AC-1 for power circuit<br>16 A (<= 70 °C) at 690 V AC AC-1 for power circuit<br>12 A at <= 440 V AC AC-3 for power circuit  |
| Control circuit type                        | AC 50/60 Hz  |
| [Uc] control circuit voltage                | 230 V AC 50/60 Hz  |
| Motor power kW                              | 3 kW at 220...230 V AC 50/60 Hz AC-3<br>2.2 kW at 400 V AC 50/60 Hz AC-4<br>5.5 kW at 440 V AC 50/60 Hz AC-3<br>5.5 kW at 380...415 V AC 50/60 Hz AC-3<br>4 kW at 480 V AC 50/60 Hz AC-3<br>4 kW at 500...600 V AC 50/60 Hz AC-3<br>4 kW at 660...690 V AC 50/60 Hz AC-3   |
| Auxiliary contact composition               | 1 NO   |
| [Uimp] rated impulse withstand voltage      | 8 kV   |
| Overvoltage category                        | III  |
| [Ith] conventional free air thermal current | 20 A at <= 50 °C for power circuit<br>10 A at <= 50 °C for signalling circuit  |
| Irms rated making capacity                  | 110 A AC for signalling circuit conforming to IEC 60947<br>144 A AC for power circuit conforming to NF C 63-110<br>144 A AC for power circuit conforming to IEC 60947  |
| Rated breaking capacity                     | 110 A at 440 V conforming to IEC 60947<br>80 A at 500 V conforming to IEC 60947<br>70 A at 660...690 V conforming to IEC 60947   |
| [Icw] rated short-time withstand current    | 80 A 1 s signalling circuit<br>90 A 500 ms signalling circuit<br>110 A 100 ms signalling circuit<br>115 A <= 50 °C 1 s power circuit<br>105 A <= 50 °C 5 s power circuit<br>100 A <= 50 °C 10 s power circuit<br>75 A <= 50 °C 30 s power circuit<br>55 A <= 50 °C 1 min power circuit<br>50 A <= 50 °C 3 min power circuit<br>25 A <= 50 °C >= 15 min power circuit |
| Associated fuse rating                      | 25 A gG at <= 440 V for power circuit<br>25 A aM for power circuit<br>10 A gG for signalling circuit conforming to IEC 60947<br>10 A gG for signalling circuit conforming to VDE 0660  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|  |  |
|--|--|
| Average impedance                          | 3 mOhm at 50 Hz - lth 20 A for power circuit   |
| [U <sub>i</sub> ] rated insulation voltage | 690 V for power circuit conforming to IEC 60947-4-1<br>600 V for power circuit conforming to UL 508<br>690 V for signalling circuit conforming to IEC 60947-4-1<br>690 V for signalling circuit conforming to IEC 60947-5-1<br>600 V for signalling circuit conforming to UL 508<br>600 V for power circuit conforming to CSA C22.2 No 14<br>600 V for signalling circuit conforming to CSA C22.2 No 14  |
| Insulation resistance                      | > 10 MOhm for signalling circuit   |
| Inrush power in VA                         | 30 VA at 20 °C   |
| Hold-in power consumption in VA            | 4.5 VA at 20 °C  |
| Heat dissipation                           | 1.3 W  |
| Control circuit voltage limits             | 0.2...0.75 U <sub>c</sub> at ≤ 50 °C drop-out<br>0.8...1.15 U <sub>c</sub> at ≤ 50 °C operational  |
| Connections - terminals                    | Screw clamp terminals 1 cable(s) 1.5...4 mm <sup>2</sup> - cable stiffness: solid<br>Screw clamp terminals 1 cable(s) 0.75...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end<br>Screw clamp terminals 1 cable(s) 0.34...2.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end<br>Screw clamp terminals 2 cable(s) 1.5...4 mm <sup>2</sup> - cable stiffness: solid<br>Screw clamp terminals 2 cable(s) 0.75...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end<br>Screw clamp terminals 2 cable(s) 0.34...1.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end |
| Operating rate                             | 3600 cyc/h   |
| Auxiliary contacts type                    | Type instantaneous (1 NO)  |
| Signalling circuit frequency               | ≤ 400 Hz   |
| Minimum switching current                  | 5 mA for signalling circuit  |
| Minimum switching voltage                  | 17 V for signalling circuit  |
| Mounting support                           | Plate<br>Rail  |
| Tightening torque                          | 1.3 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>1.3 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm  |
| Operating time                             | 10...20 ms coil de-energisation and NO opening<br>10...20 ms coil energisation and NO closing  |
| Safety reliability level                   | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1   |
| Non overlap distance                       | 0.5 mm   |
| Mechanical durability                      | 10 Mcycles   |
| Electrical durability                      | 0.3 Mcycles 20 A AC-1 at U <sub>e</sub> ≤ 440 V<br>1.3 Mcycles 12 A AC-3 at U <sub>e</sub> ≤ 440 V   |
| Mechanical robustness                      | Shocks contactor closed, on X axis 10 Gn for 11 ms IEC 60068-2-27<br>Shocks contactor closed, on Y axis 15 Gn for 11 ms IEC 60068-2-27<br>Shocks contactor closed, on Z axis 15 Gn for 11 ms IEC 60068-2-27<br>Shocks contactor opened, on X axis 6 Gn for 11 ms IEC 60068-2-27<br>Shocks contactor opened, on Y axis 10 Gn for 11 ms IEC 60068-2-27<br>Shocks contactor opened, on Z axis 10 Gn for 11 ms IEC 60068-2-27<br>Vibrations contactor closed 4 Gn, 5...300 Hz IEC 60068-2-6<br>Vibrations contactor opened 2 Gn, 5...300 Hz IEC 60068-2-6  |
| Height                                     | 58 mm  |
| Width                                      | 45 mm  |
| Depth                                      | 57 mm  |
| Product weight                             | 0.18 kg  |

## Environment

|                         |  |
|-------------------------|--|
| standards               | BS 5424<br>IEC 60947<br>NF C 63-110<br>VDE 0660          |
| product certifications  | CSA<br>UL  |
| IP degree of protection | IP2x conforming to VDE 0106                              |
| protective treatment    | TC conforming to IEC 60068<br>TC conforming to DIN 50016 |

|                                       |  |
|---------------------------------------|--|
| ambient air temperature for operation | -25...50 °C  |
| ambient air temperature for storage   | -50...80 °C  |
| operating altitude                    | 2000 m without derating  |
| flame retardance                      | V1 conforming to UL 94<br>Requirement 2 conforming to NF F 16-101<br>Requirement 2 conforming to NF F 16-102 |

### Offer Sustainability

|                                  |   |
|----------------------------------|---|
| Sustainable offer status         | Green Premium product   |
| RoHS (date code: YYWW)           | Compliant - since 0633 - Schneider Electric declaration of conformity |
| REACH                            | Reference not containing SVHC above the threshold                     |
| Product environmental profile    | Available   |
| Product end of life instructions | Available   |