


Magnetas 5x5x5mm NdFeB N42

1. Technical information

| | |
|-----------------------------|---|
| Article | W-05-N |
| Shape | Cube |
| Length | 5 mm |
| Tolerance in size | +/- 0,1 mm |
| Material | NdFeB (Neodymium Iron Boron) |
| Type of coating | Nickel (Ni-Cu-Ni) |
| Strength | approx. 1,1 kg approx. 10,8 N |
| Weight | 0,95 g |
| Manufacturing method | sintered |
| Magnetisation (Grade) | N42 |
| Max. working temperature | 80 °C |
| Curie temperature | 310 °C |
| Residual magnetism Br | 12900-13200 G 1.29-1.32 T |
| Coercive field strength bHc | 10.8-12.0 kOe 860-955 kA/m |
| Coercive field strength iHc | ≥12 kOe ≥955 kA/m |
| Energy product (BxH)max | 40-42 MGOe 318-334 kJ/m ³ |



Free of harmful substances according to RoHS Directive 2002/95/EC.
Exempt from registration according to REACH.

UAB “LEMONA”

Įmonės kodas 133321178
PVM mokėtojo k. LT333211716
Adresas S.Raštikio g. 26, Kaunas
Bankas Swedbank, AB
Atsiskaitomoji sąskaita LT 437300010002507993

KAUNAS

Savanorių pr. 271,
Tel. (8-37) 337711
Faks. (8-37) 311013
Mob. 861619777
kaunas@lemona.lt

ŠIAULIAI

Tilžės g. 124,
Tel. (8-41) 500360
Faks. (8-41) 500361
Mob. 8-616 19000
siauliai@lemona.lt

KLAIPĖDA

Birutės g. 2,
Tel.: (8-46) 422400
Faks.: (8-46) 422403
Mob.: 8-616 19666
klaipeda@lemona.lt


VILNIUS

Vytenio g. 22,
Tel. (8-5) 2105400
Faks. (8-5) 2105401
Mob. 8-616 19999
vilnius@lemona.lt




VILNIUS

J. Kubiliaus g. 23,
Tel. (8-5) 2747060
Faks. (8-5) 2747061
Mob. 8-616 19222
zirmunai@lemona.lt

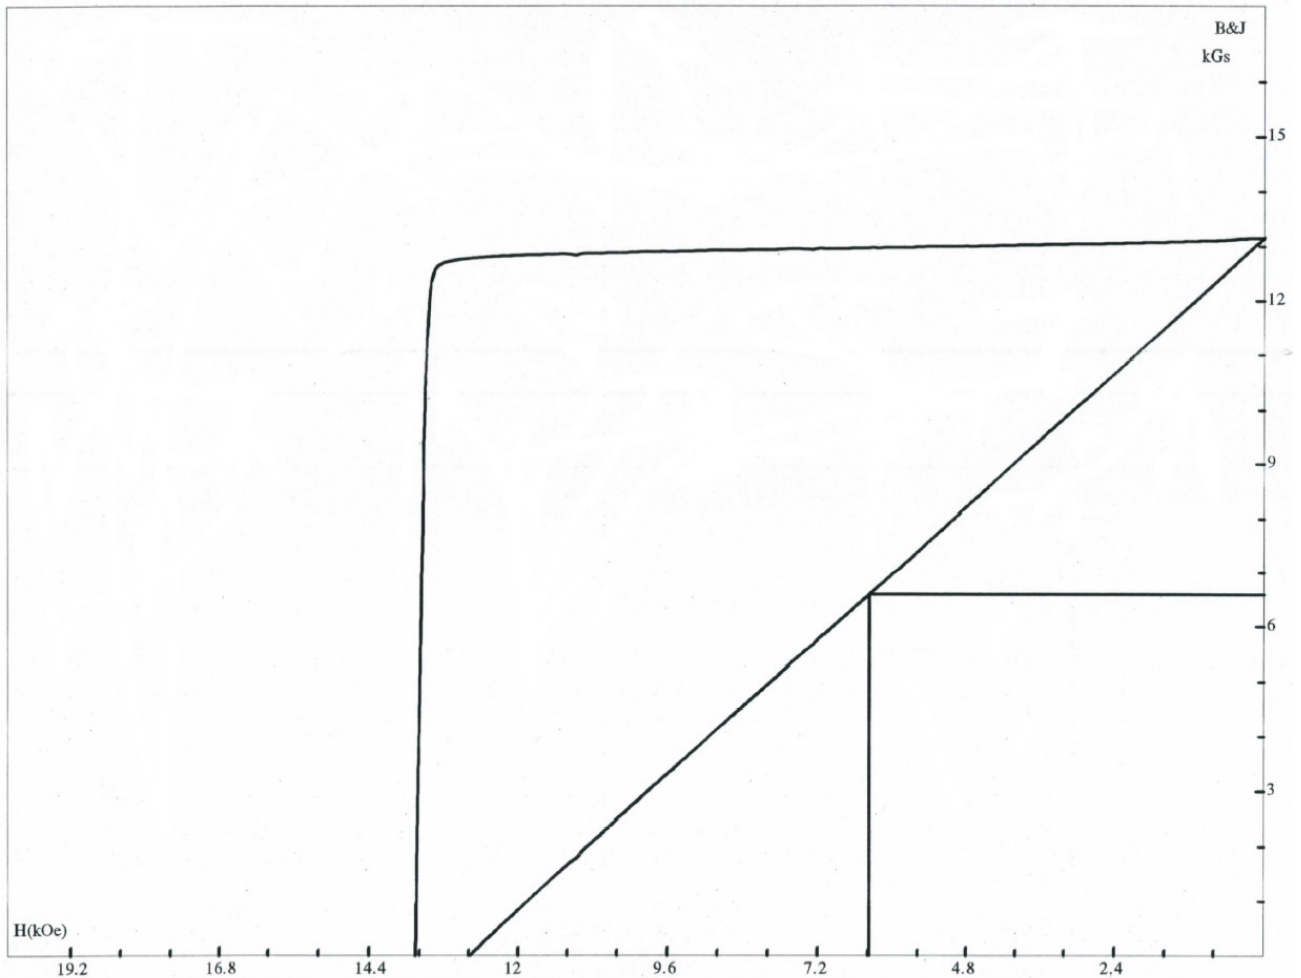2. Demagnetisation curve N42



3. Safety tips

| | |
|---|---|
| <p>Danger</p>  | <p>Swallowing</p> <p>Children could swallow small magnets. If several magnets are swallowed, they could get stuck in the intestine and cause perilous complications.</p> <p>Magnets are not toys! Make sure that children don't play with magnets.</p> |
| <p>Warning</p>  | <p>Pacemaker</p> <p>Magnets could affect the functioning of pacemakers and implanted heart defibrillators.</p> <ul style="list-style-type: none"> • A pacemaker could switch into test mode and cause illness. • A heart defibrillator may stop working. <p>• If you wear these devices keep sufficient distance to magnets: www.supermagnete.de/eng/faq/distance</p> <p>• Warn others who wear these devices from getting too close to magnets.</p> |
| <p>Warning</p>  | <p>Metal splinters</p> <p>Neodymium magnets are brittle. Colliding magnets could crack. Sharp splinters could be catapulted away for several meters and injure your eyes.</p> <ul style="list-style-type: none"> • Avoid the collision of magnets. • Wear safety glasses when handling larger magnets. • Make sure that nearby people are also protected or keep their distance. |

UAB "LEMONA"

Įmonės kodas
PVM mokėtojo k.

Adresas

Bankas

Atsiskaitomoji sąskaita

133321178

LT333211716

S.Raštikio g. 26, Kaunas

Swedbank, AB

LT 437300010002507993

KAUNAS

Savanorių pr. 271,
Tel. (8-37) 337711

Faks. (8-37) 311013

Mob. 861619777

kaunas@lemona.lt

ŠIAULIAI

Tilžės g. 124,
Tel. (8-41) 500360

Faks. (8-41) 500361

Mob. 8-616 19000

siauliai@lemona.lt

KLAIPĖDA

Birutės g. 2,
Tel.: (8-46) 422400

Faks.: (8-46) 422403

Mob.: 8-616 19666

klaipeda@lemona.lt

VILNIUS

Vytenio g. 22,
Tel. (8-5) 2105400

Faks. (8-5) 2105401

Mob. 8-616 19999

vilnius@lemona.lt

VILNIUS








J. Kubiliaus g. 23,
Tel. (8-5) 2747060

Faks. (8-5) 2747061

Mob. 8-616 19222

zirmunai@lemona.lt

4. Handling and storing

| | |
|--|--|
| <p>Caution</p>  | <p>Magnetic field</p> <p>Magnets produce a far-reaching, strong magnetic field. They could damage TVs and laptops, computer hard drives, credit and ATM cards, data storage media, mechanical watches, hearing aids and speakers.</p> <ul style="list-style-type: none"> • Keep magnets away from devices and objects that could be damaged by strong magnetic fields. • Please refer to our table of recommended distances: www.supermagnete.de/eng/faq/distance |
| <p>Caution</p>  | <p>Combustibility</p> <p>When machining magnets, the drilling dust could easily ignite.</p> <p>Stay away from machining magnets or use appropriate tools and sufficient cooling water.</p> |
| <p>Caution</p>  | <p>Nickel allergy</p> <p>Many of our magnets have coatings that contain nickel.</p> <ul style="list-style-type: none"> • Some people have an allergic reaction when they come into contact with nickel. • Nickel allergies could develop from constant contact with nickel-plated objects. • Avoid constant skin contact with nickel-plated magnets. • Avoid contact with magnets if you already have a nickel allergy. |
| <p>Notice</p>  | <p>Influence on people</p> <p>According to the current level of knowledge, magnetic fields of permanent magnets do not have a measurable positive or negative influence on people. It is unlikely that permanent magnets constitute a health risk, but it cannot be ruled out entirely.</p> <ul style="list-style-type: none"> • For your own safety, avoid constant contact with magnets. • Store large magnets at least one metre away from your body. |
| <p>Notice</p>  | <p>Splintering of coating</p> <p>Most of our neodymium magnets have a thin nickel-copper-nickel coating to protect them from erosion. This coating could splinter or crack due to collision or large pressure. This makes them vulnerable to environmental influences like moisture and they could oxidise.</p> <ul style="list-style-type: none"> • Separate big magnets, especially spheres, with a piece of cardboard. • Avoid collisions of magnets as well as repeated mechanical exposure (e.g. blows, bashes). |
| <p>Notice</p>  | <p>Oxidation, corrosion, rust</p> <p>Untreated neodymium magnets oxidise quickly and disintegrate.</p> <p>Most of our magnets have a nickel-copper-nickel coating to protect them from corrosion. This coating provides some protection against corrosion, but it is not robust enough for continuous outdoor use.</p> <ul style="list-style-type: none"> • Use magnets only in the dry indoors or protect them against environmental influences. • Avoid damages to the coating. |
| <p>Notice</p>  | <p>Temperature resistance</p> <p>Neodymium magnets have a maximum working temperature of 80 to 200 °C.</p> <p>Most neodymium magnets lose part of their adhesive force permanently at a temperature of 80 °C.</p> <ul style="list-style-type: none"> • Don't use magnets in places where they are exposed to extreme heat. • If you use an adhesive, don't harden it with hot air. |

UAB "LEMONA"
 Įmonės kodas
 PVM mokėtojo k.
 Adresas
 Bankas
 Atsiskaitomoji sąskaita

133321178
 LT333211716
 S.Raštikio g. 26, Kaunas
 Swedbank, AB
 LT 437300010002507993


KAUNAS
 Savanorių pr. 271,
 Tel. (8-37) 337711
 Faks. (8-37) 311013
 Mob. 861619777
kaunas@lemona.lt

ŠIAULIAI
 Tilžės g. 124,
 Tel. (8-41) 500360
 Faks. (8-41) 500361
 Mob. 8-616 19000
siauliai@lemona.lt


KLAIPĖDA
 Birutės g. 2,
 Tel.: (8-46) 422400
 Faks.: (8-46) 422403
 Mob.: 8-616 19666
klaipeda@lemona.lt


VILNIUS
 Vytenio g. 22,
 Tel. (8-5) 2105400
 Faks. (8-5) 2105401
 Mob. 8-616 19999
vilnius@lemona.lt

VILNIUS
 J. Kubiliaus g. 23,
 Tel. (8-5) 2747060
 Faks. (8-5) 2747061
 Mob. 8-616 19222
zirmunai@lemona.lt

| | |
|---|--|
|  | Notice |
| | Mechanical treatment Neodymium magnets are brittle, heat-sensitive and oxidise easily. <ul style="list-style-type: none"> • When drilling or sawing a magnet with improper tools, the magnet may break. • The emerging heat may demagnetise the magnet. • The magnet will oxidise and disintegrate due to the damaged coating. Avoid machining magnets if you do not have the necessary machines and experience. Let us provide you with an offer for a custom-made order instead: www.supermagnete.de/eng/custom_form.php |

5. Transportation tips

| | |
|---|---|
|  | Caution |
| | Airfreight Magnetic fields of improperly packaged magnets could influence airplane navigation devices. In the worst case it could lead to an accident. <ul style="list-style-type: none"> • Airfreight magnets only in packaging with sufficient magnetic shielding. • Please refer to the respective regulations: www.supermagnete.de/eng/faq/airfreight |

| | |
|---|--|
|  | Caution |
| | Postage Magnetic fields of improperly packaged magnets could cause disturbances in sorting machines and damage fragile goods in other packages. <ul style="list-style-type: none"> • Please refer to our shipping tips: www.supermagnete.de/eng/faq/shipping • Use a large box and place the magnet in the middle surrounded by lots of padding material. • Arrange magnets in a package in a way that the magnetic fields neutralise each other. • If necessary, use sheet iron to shield the magnetic field. • There are stricter rules for airfreight: Refer to the warning notice "Airfreight". |

6. Disposal tips

Small amounts of used neodymium magnets can be thrown out with the regular trash. Larger amounts of magnets need to be recycled as scrap metal.

7. Statutory provisions

Neodymium magnets are not intended for use in or export to the USA, Canada or Japan. You are strictly prohibited from directly or indirectly exporting the neodymium magnets that you received from us or the end products that you produced from those magnets to the countries mentioned above.

TARIC-Code: 8505.11.00.99

UAB "LEMONA"
 Įmonės kodas
 PVM mokėtojo k.
 Adresas
 Bankas
 Atsiskaitomoji sąskaita

133321178
 LT333211716
 S.Raštikio g. 26, Kaunas
 Swedbank, AB
 LT 437300010002507993

KAUNAS
 Savanorių pr. 271,
 Tel. (8-37) 337711
 Faks. (8-37) 311013
 Mob. 861619777
kaunas@lemona.lt

ŠIAULIAI
 Tilžės g. 124,
 Tel. (8-41) 500360
 Faks. (8-41) 500361
 Mob. 8-616 19000
siauliai@lemona.lt

KLAIPĖDA
 Birutės g. 2,
 Tel.: (8-46) 422400
 Faks.: (8-46) 422403
 Mob.: 8-616 19666
klaipeda@lemona.lt

VILNIUS
 Vytenio g. 22,
 Tel. (8-5) 2105400
 Faks. (8-5) 2105401
 Mob. 8-616 19999
vilnius@lemona.lt

VILNIUS
 J. Kubiliaus g. 23,
 Tel. (8-5) 2747060
 Faks. (8-5) 2747061
 Mob. 8-616 19222
zirmunai@lemona.lt