


# R13-37

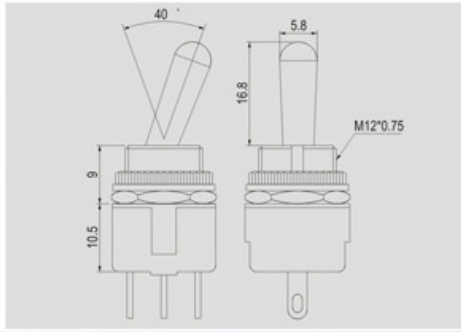

<b>Rating</b>
6A 125V AC 3A 250V AC
<b>Contact resistance</b>
50mΩ Max
<b>Insulation resistance</b>
DC 500V 100MΩ Min
<b>Dielectric strength</b>
AC 1000V 1 minute
<b>Cut-out</b>

## FEATURES

- \* MATERIAL: Metal lever and bushing are nickel plated metal. Frames are metal plated.
- \* Phenolic base.
- \* Indicator plate and waterproof boot are optional.
- \* Application: Ceiling fan.



## R13-37 -

