

ACCU-18650/SPCB




Battery: Lithium

Size : 18650

Capacity: 2600 mAh

Rated voltage: 3,7 V

CELL: SANYO UR18650F 2600mAh

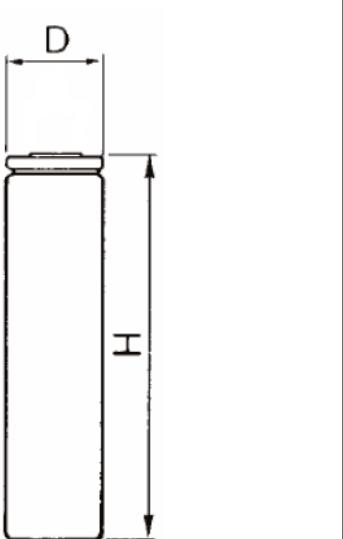		
Dimensions(Typ.)	H	69,9 mm
of	D	18,7 mm
Bare Cell		



Cell Type UR18650F Specifications


Dimensions(Typ.) of Bare Cell	H 64.7 mm D 18.05 mm d 9.0 mm
Typical Capacity	2600mAh
Nominal Capacity	Min.2500mAh
Nominal Voltage	3,7V
Charging Method	Constant Current -Constans Voltage
Charging Voltage	4,2V
Charging Current	Std.1750mA
Charging Time	2,5hrs.
Ambient Temperature	Charge 0~+40°C Discharge -20~+60°C Storage -20~+50°C
Weight (Max.)	47,0g
Dimensions (Max.)	(D) 18,10mm (H) 64,80mm
Volumetric Energy Density	554Wh/l
Gravimetric Energy Density	196Wh/kg

*The maximum thickness of the standard shipment charging condition


Discharged State after Assembling

Typical Characteristics


Discharge rate characteristics

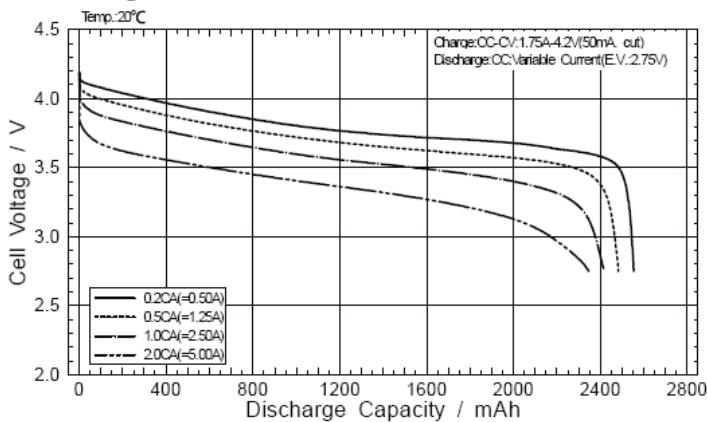


Discharge temperature characteristics

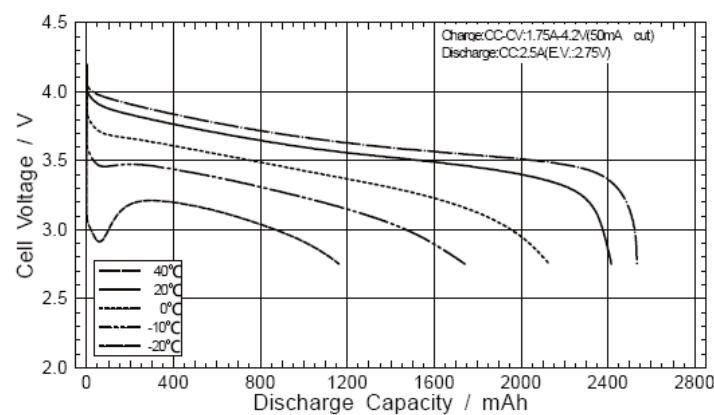


Charge characteristics

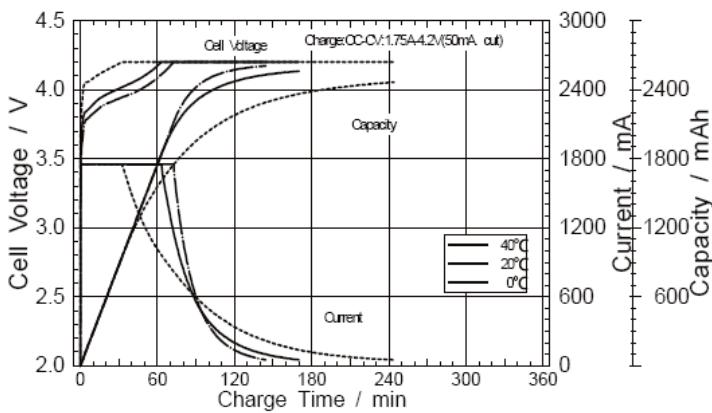

Cycle characteristics

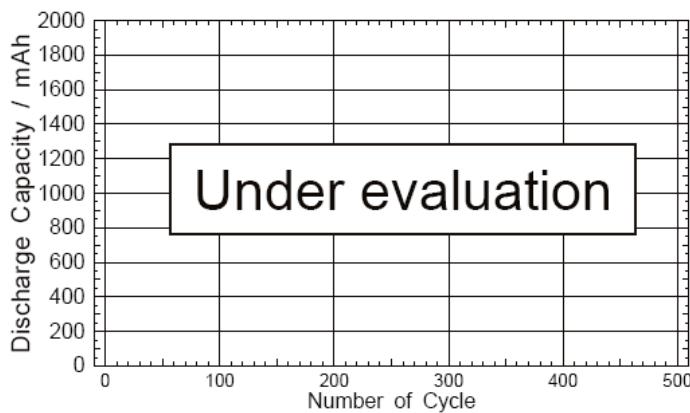

Details :

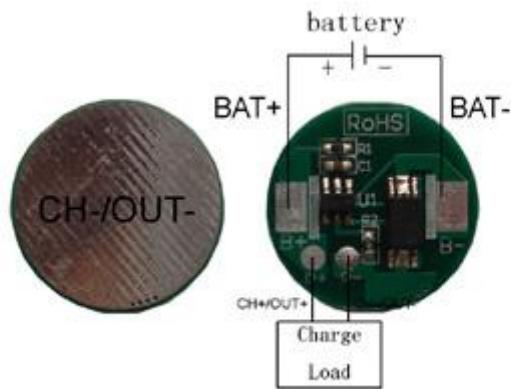

Technical parameters :

No.	Test item	Criterion
1	Voltage	Charging voltage
		Balance voltage for single cell
2	Current	Balance current for single cell
		Current consumption
		Maximal continuous charging and discharging current
3	Over-charge Protection	Over charge detection voltage
		Over charge detection delay time
		Over charge release voltage
4	Over-discharge Protection	Over discharge detection voltage
		Over discharge detection delay time
		Over discharge release voltage
5	Over-Current Protection	Over current detection voltage
		Over current detection current
		Detection delay time
		Release condition
6	Short Protection	Detection condition
		Detection delay time
		Release condition
7	Resistance	Protection circuitry (B- to P-) $\leq 60m\Omega$
8	Temperature	Operating temperature range $-40\sim +85^\circ C$
		Storage temperature range $-40\sim +125^\circ C$
9	Size	18mm