

圖號. DRAWING. NO : FP3S-05BH-5

品名 NAME : HEAT SHRINKABLE SPADE TERMINALS

校訂版次 REVISIONS

| 版次 | 記述 DESCRIPTION | DATE | 核可 |
|----|----------------|--------------|------|
| 4 | 新增產品敘述 | 2018. 10. 23 | ANDY |
| 5 | 產品尺寸更改 | 2023. 07. 03 | KEN |
| | | | |




MAXIMUM ELECTRIC CURRENT

| A. W. G | 12 | 10 |
|---------|----|----|
| MAX AMP | 35 | 50 |


NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

| WIRE RANGE AWG/mm ² | 產品編號 ITEM NO. | d2 ±0.20 | B ±0.20 | L ±3.00 | d1 ±0.20 | t |
|-----------------------------------|------------------|-------------|------------|------------|-------------|-----|
| 12-10 AWG 4-6 mm ² | S5-4LBH | 4.3 | 9.5 | 32.5 | 3.4 | 1.0 |
| | S5-5BH | 5.3 | 9.5 | 32.5 | | |
| | S5-6LBH | 6.5 | 12.0 | 39.0 | | |

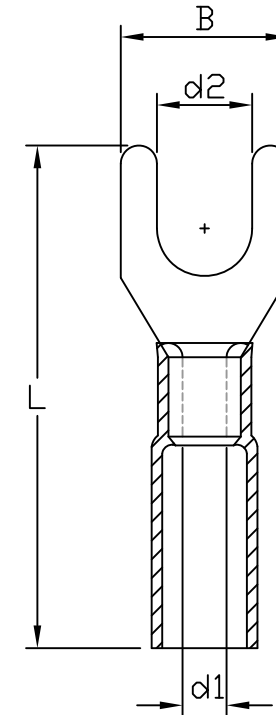

| 認可 APPROVALS | |
|--------------|------|
| 製圖 DRAFT: | TINA |
| 設計 DESING: | KEN |
| 核可 CHECKED: | KEN |



| MATERIAL |
|-------------------------------|
| INSULATION : HEAT-SHRINK TUBE |
| MATERIAL : COPPER |
| TIN PLATING |

| 單位 UNIT |
|----------|
| m/m |
| 比例 SCALE |
| |

 集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE: 2015. 01. 05