


New Tech Flexible COB led strips 528led/m



Dimensions(mm):



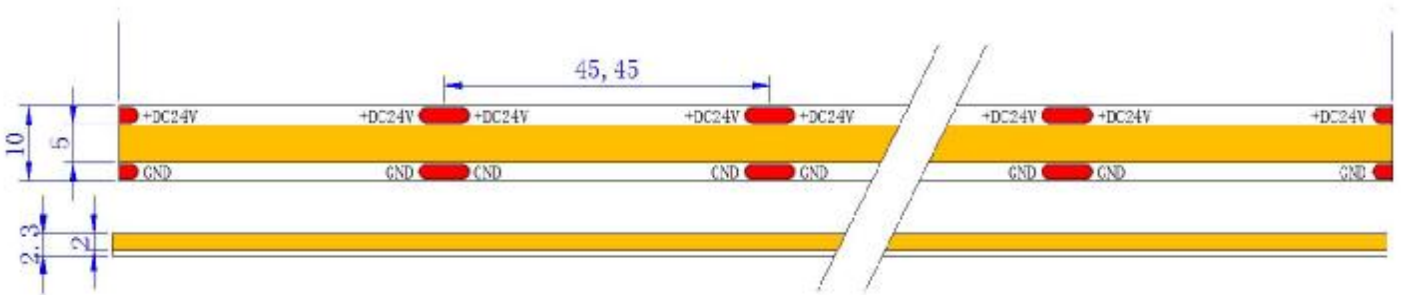

Features & benefits

- No-dot design suitable for all optic covers, 528 led/m.
- COB LED tech, 180° beam angle, uniform lighting.
- Innovative design on circuit board for rough bending
- Slim PCB with great flexibility, 2 Oz cooper PCB.
- CRI>90, Only one bin for each CCT.
- Fit to various aluminum profiles.
- 5 Years warranty

Application

- LED linear lighting
- Bracklit, Aluminum profile and other Linear decoration

Technical information

| Part No. | Color | Wave length | Voltage | Power | Lumen | CRI | Viewing Angle | LED QTY(/m) | LED Type | PCB width |
|-------------------|---|-------------|---------|-------|--------|-----|---------------|-------------|----------|-----------|
| TB10-COB528W-24V |  white | 6500k | 24VDC | 14W/m | 1350lm | >90 | 180° | 528 led | COB LED | 10mm |
| TB10-COB528WW-24V |  WW | 3000k | 24VDC | 14W/m | 1300lm | >90 | 180° | 528 led | COB LED | 10mm |

| | | | |
|----------------|--|---------------------|-------------------------|
| Cutting length | 24V: 45mm 24LEDs | working temperature | -25~+60°C |
| IP Rate | IP20/IP68 | Max Run | 24V: 5 meters (one end) |
| Installation | Adhesive 3M tape(Mouting Clips for IP68) | Dimmable | Yes |
| Cerfication | CE and RoHS complicant | Warranty | 5 Years |